


## Silicone Coated Glass Cloth Datasheet

Product Code: RC03820-0.7

### Product Description

Specially formulated silicone rubber is applied to one side of continuous filament glass cloth. This results in silicone coated glass cloth, which boasts outstanding weather and ageing resistance, as well as remarkable stability against ozone and UV light.

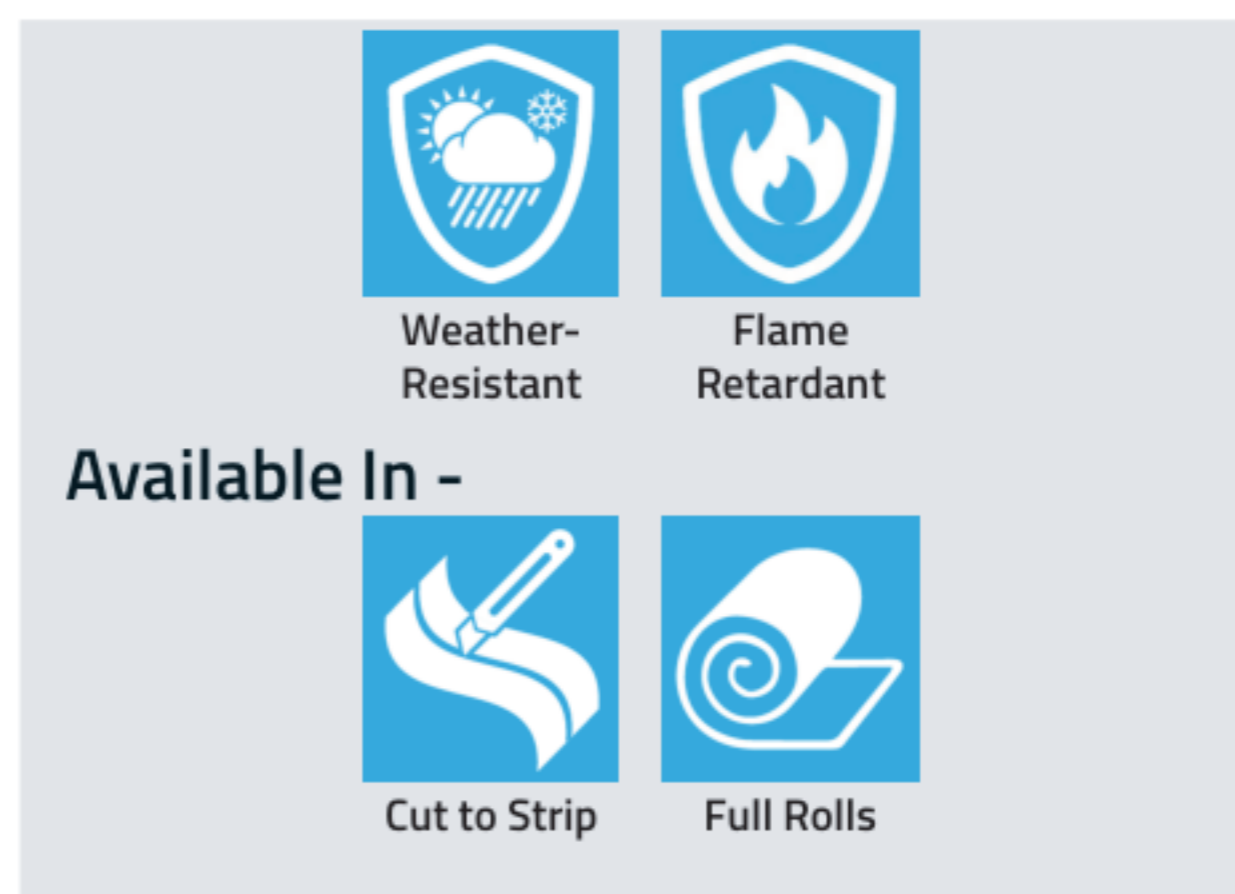

### Technical Specification

Finished Coated Fabric	Units	Value	Tolerance
Weight	g/m <sup>2</sup>	960	±5%
Thickness	mm	0.7	±5%
Standard Useable Width	mm	1550	±5%
Standard Roll Length	m	20	
Maximum Operating Temperature	Maximum continuous operating temperature is 220°C. Base fabric will withstand 550°C (unstressed).		
Colour/Description	Orange silicone coating on one side.		

Base Fabric Construction	Units	Value	Tolerance
Weight	g/m <sup>2</sup>	660	±5%
Weave Pattern	8H Satin		
Construction:			
Warp	per cm	16	±5%
Weft	per cm	15	±5%
Yarn Count:			
Warp	TEX	EC9 204	
Weft	TEX	EC9 204	



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Base Fabric Construction	Units	Value	Tolerance
Tensile Strength:			
Warp	N / cm	1280	±10%
Weft	N / cm	1000	±10%

Treatment/Coating Details	Units	Value	Tolerance
Weight	g/m <sup>2</sup>	300	±10%
300 g/m <sup>2</sup> of orange silicone on one side.			



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.