

## TICO® PFPA Hi-Duty Textile Reinforced Pad


Product Code: RC1158

### Product Description


TICO PF/PA is composed of plies of synthetic rubber-coated cotton vulcanised together to achieve a sleek surface.

Property	Value
Maximum Load Bearing Capacity	15.5 MN/m <sup>2</sup>
Ultimate Breakdown	68.2 MN/m <sup>2</sup>
Hardness	95° ± 5 IRHD
Coefficient of Friction	0.8 fabric surface to concrete 0.6 fabric surface to bright mild steel
Temperature Range	-40°C to +80°C
Recovery Properties	<ul style="list-style-type: none"> <li>- Immediately 99.49%</li> <li>- 1 Minute 99.67%</li> <li>- 3 Minutes 99.75%</li> <li>- 5 Minutes 99.80%</li> <li>- 30 Minutes 99.83%</li> </ul> <p>A pad 150mm<sup>2</sup> 25mm thick was compressed to 90% of original thickness under a static load 7/MN/m<sup>2</sup> and on release exhibited these recovery characteristics.</p>

### Static & Dynamic Properties in Compression

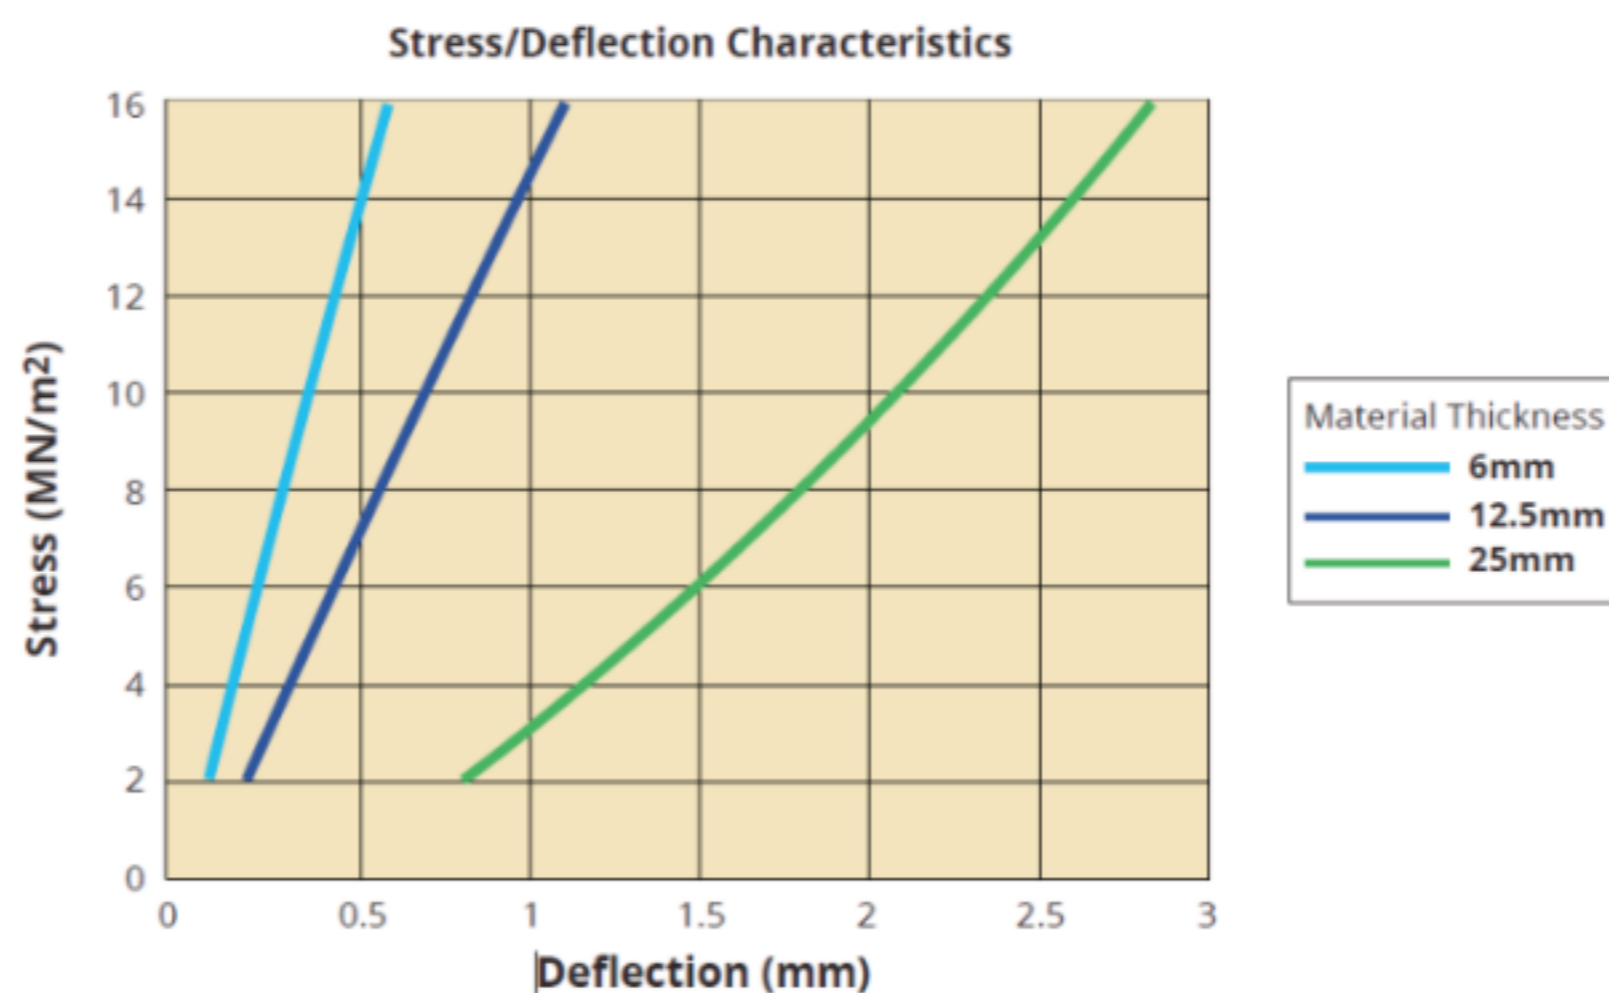

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

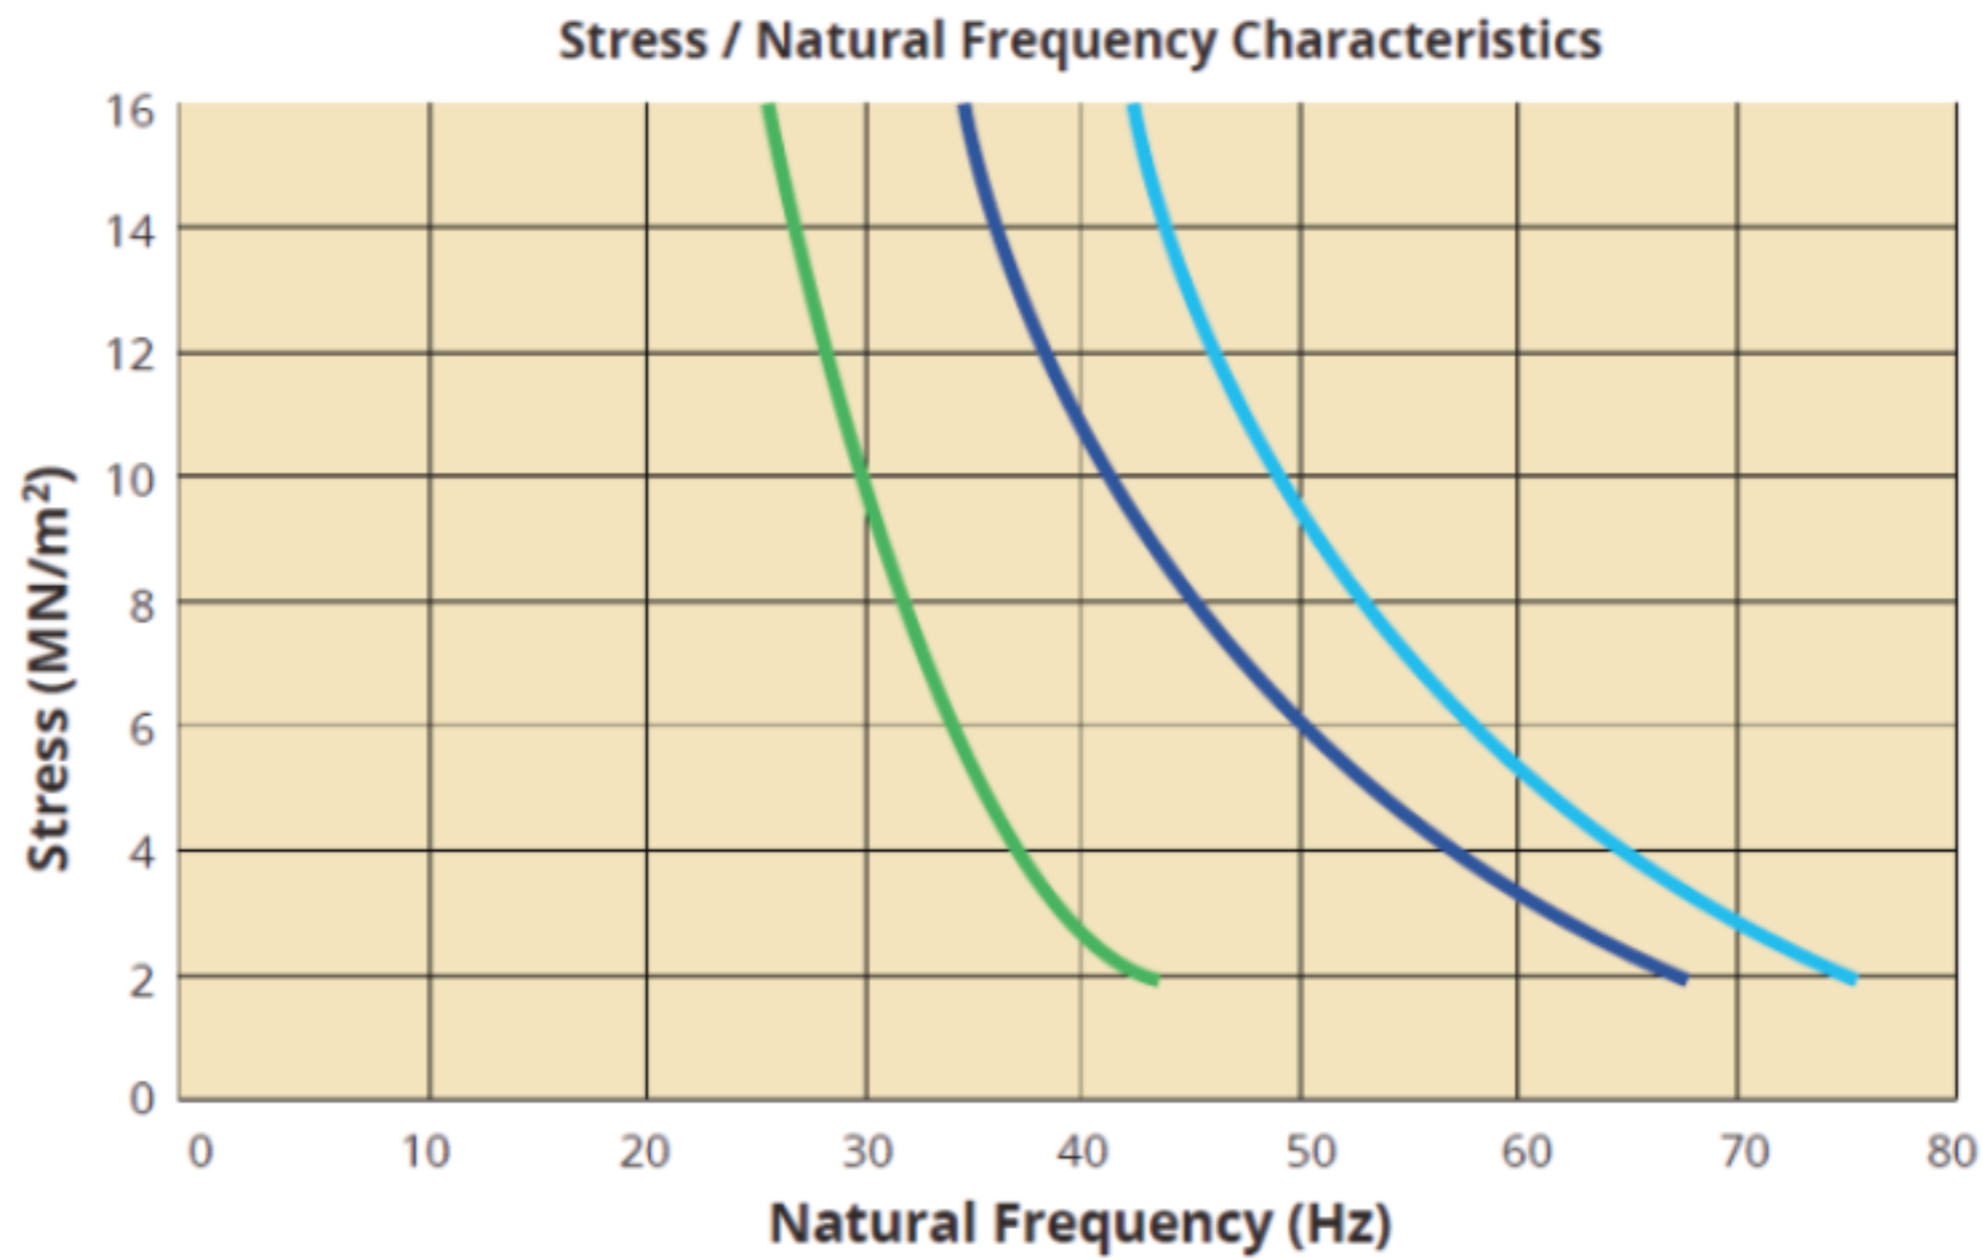

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.