


Silicone Trapezium Profile - 11mm x 20mm

Product Code: RCTR11X20V

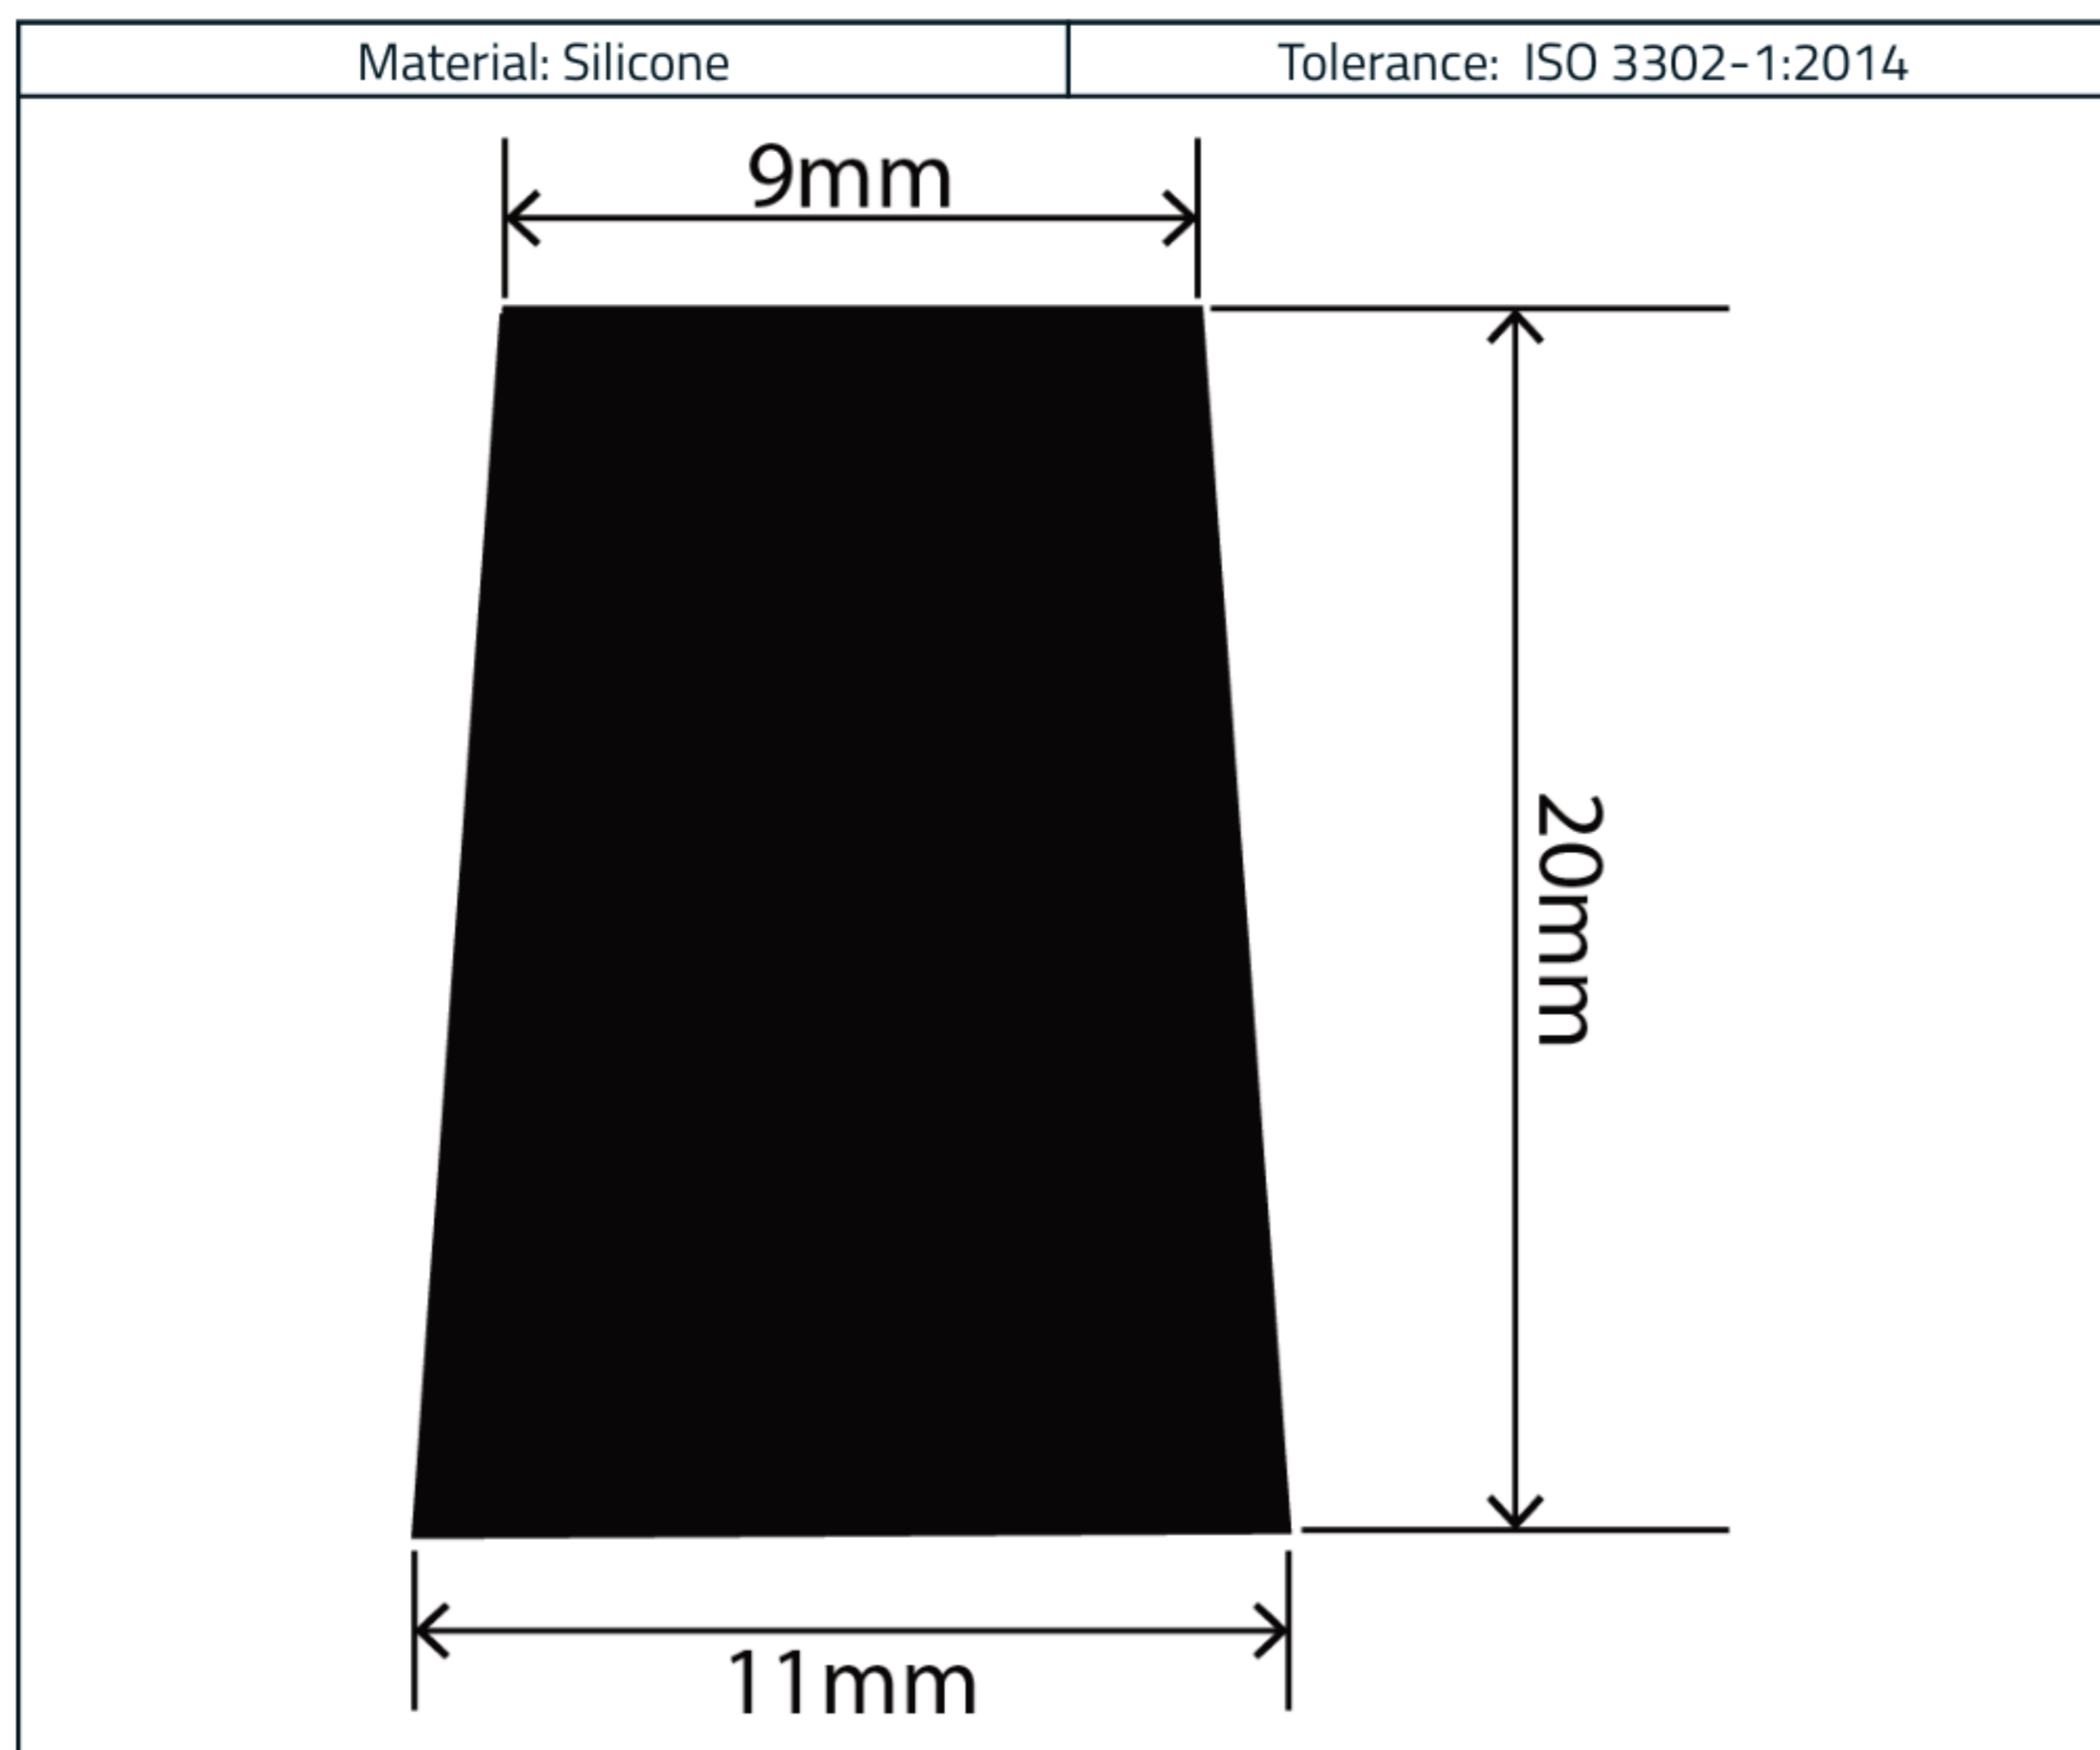

Measurements:

| Height | Width |
|--------|-------|
| 20mm | 11mm |

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

| Property | Test Method | Value |
|---------------------|----------------------------|--|
| Temperature Range | | -50°C to + 180°C (working) Up to 200°C (intermittent) |
| Appearance | | Transparent |
| Density at 20°C | ISO 1183-1 A | Approx. 1.15 g/cm ³ |
| Hardness Shore A | DIN 53505 | 61 |
| Tensile Strength | DIN 53504 S1 / ISO 37 | 11.00 N/mm ² |
| Elongation at Break | DIN 53504 S 1 | 440% |
| Tear Strength | ASTM D 624 B | 24 N/mm |
| Rebound Resilience | DIN 53512 | 57% |
| Compression Set | DIN ISO815-B (22h / 175°C) | 31% |



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.