


## Commercial Neoprene Rubber Sheeting Datasheet

Product Code: RC0318

### Product Description

This commercial neoprene rubber sheeting is an excellent, cost efficient material. This is our most popular neoprene sheeting for use in applications which don't require additional levels of resistance. Despite this neoprene sheeting offering less resistance compared to the British Standard 2752 version it is still a high-quality product.

### Technical Specification

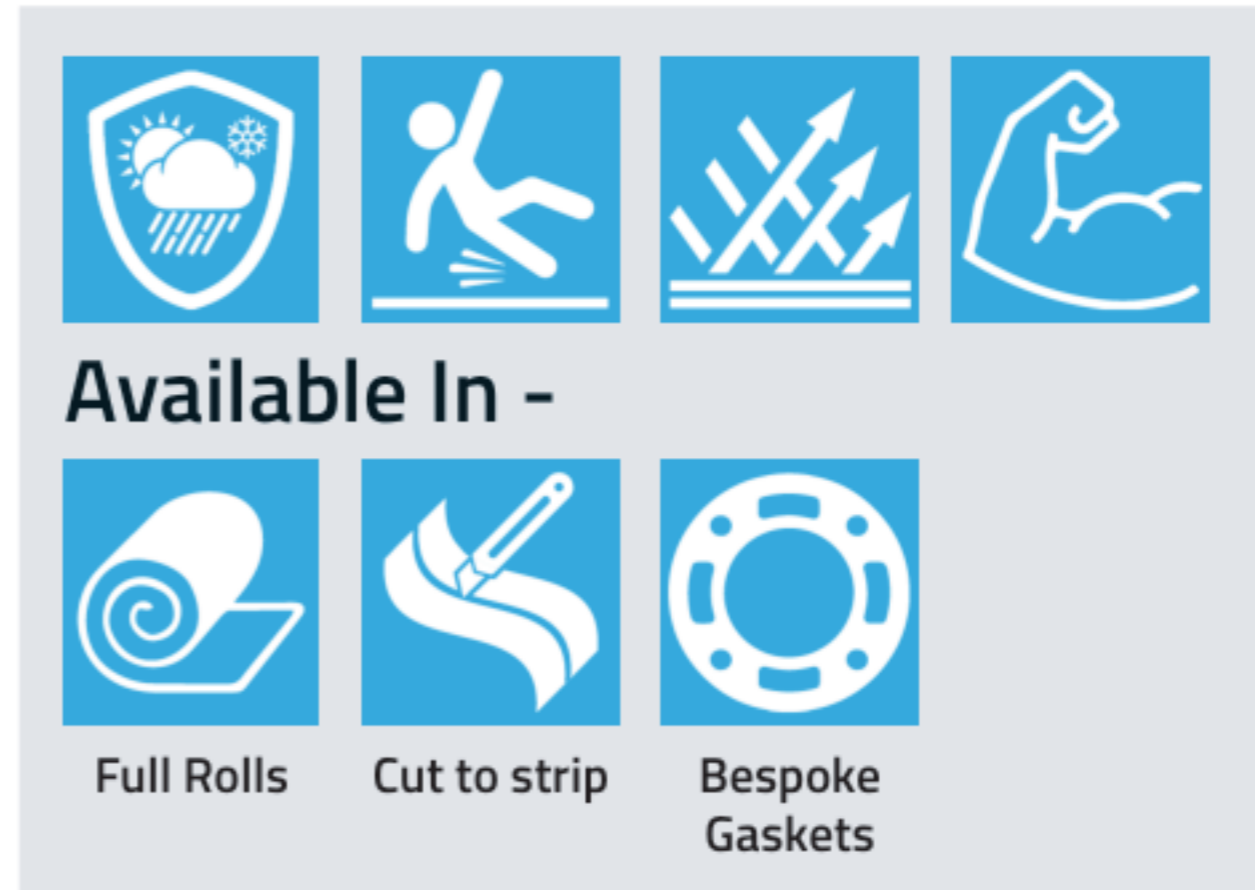

Properties	Test Method	Values
Product	-	Commercial Purpose Sheeting
Compound	-	CR/SBR
Hardness (Shore A)	ASTM D2240	50° ± 5°
Density	ASTM D297	1.45 ± 0.05 g/cm <sup>3</sup>
Tensile Strength	ASTM D412	40 kg/cm <sup>2</sup>
Elongation at Break	ASTM D412	200%
Tear Resistance	ASTM D624	18 kg/cm
Compression Set (24hrs @ 70°C)	ASTM D395 METHOD B	40%
Working Temperature Range	-	-30°C to + 90°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Standard Sizes

Properties	Weight (Kg/m <sup>2</sup> )
1.5mm x 1.4m x 20m	1.88
2mm x 1.4m x 20m	2.50
3mm x 1.4m x 10m	3.75
4mm x 1.4m x 10m	5.00
5mm x 1.4m x 10m	6.25
6mm x 1.4m x 10m	7.50
10mm x 1.4m x 5m	12.50
12mm x 1.4m x 5m	15.00



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.