


Snow Plough Rubber Sheeting Datasheet

Product Code: RC0346

Product Description

Snow Plough Rubber sheeting must be manufactured to be able to withstand strong abrasive uses. This means that we must use high quality abrasion resistant sheeting to produce this product. It is perfect for use in high friction applications where the material is under frequent or constant wear and tear.

Meets ASTM D 2000 M2 AA612A13B13C12G21J1

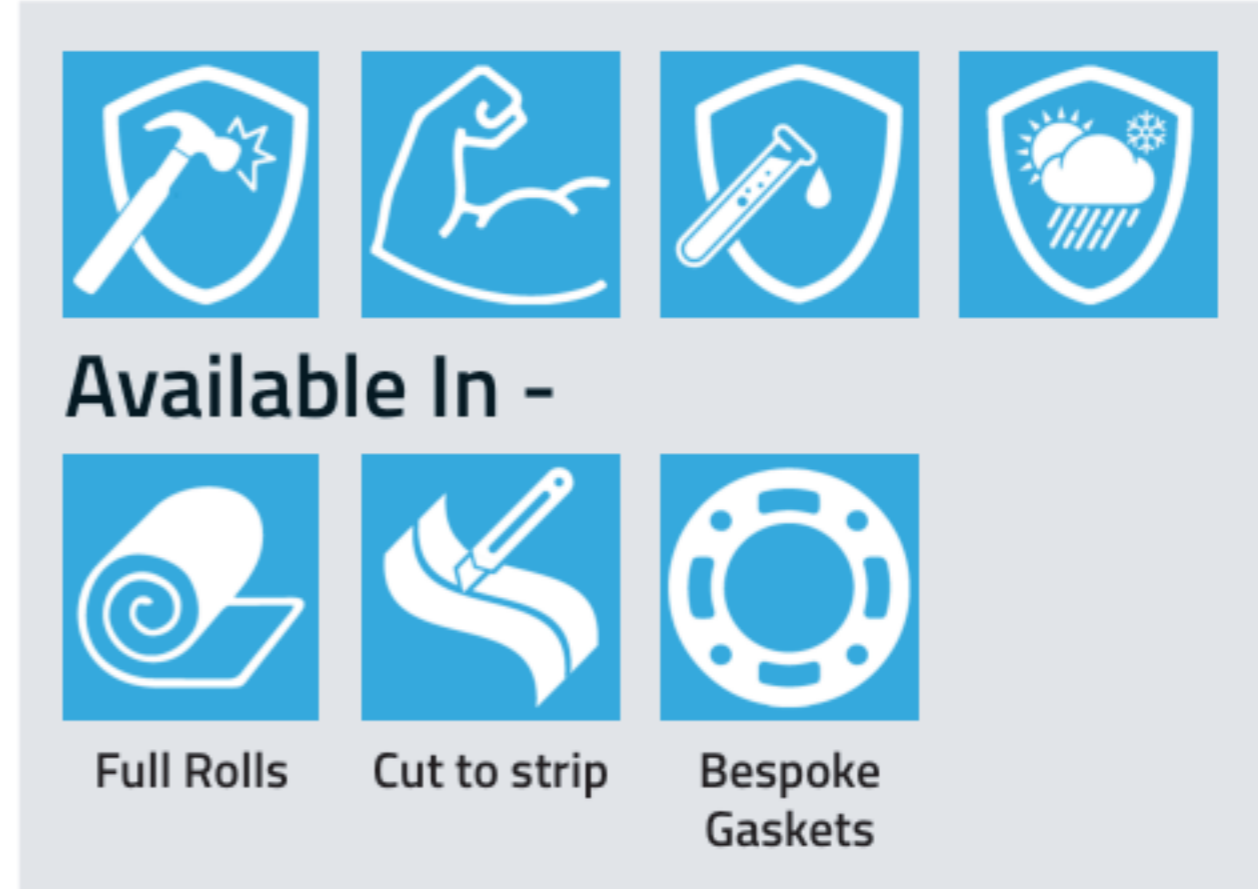

Technical Specification



Properties	Test Method	Values
Product	-	Snow Plough Rubber Sheeting
Compound	-	NR/SBR
Hardness (Shore A)	ASTM D2240	60° ± 5°
Density (Specific Gravity)	ASTM D297	1.17 g/cm ³
Tensile Strength	ASTM D412	115 Kg/cm ²
Elongation at Break	ASTM D412	450%
Tear Strength	ASTM D624	30 Kg/cm
Abrasion Resistance	ASTM D5963	120 mm ³
Compression Set (22h, 70°)	ASTM D395 METHOD B	30%
Working Temperature Range	-	-25°C to +70°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Standard Sizes

Properties
15mm x 1.4m x 5m
20mm x 1.4m x 5m
25mm x 1.4m x 5m



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.