

## TPO Roof Grip Matting Datasheet

Product Code: RC04127

### Product Description

Our TPO roof grip mats are a highly specialist matting product designed to provide safe access to high level walkways in a variety of weather conditions. Unlike sloped roofs, flat roofs are prone to becoming water logged due to the poor drainage they offer. The build-up of water can lead to the roof becoming slippery and unsafe to walk on.

### Size Specifications

Stock Sizes	Thickness	Weight (Kg/m <sup>2</sup> )
10m x 0.6m	12mm	5.2
10m x 0.75m	12mm	5.2




### Technical Specification

Properties	Data
Product	Anti-Slip Roof Walkway Matting
Composition	Thermoplastic Polyolefin
Acoustic Insulation	Excellent sound absorption properties
Fire Resistance	EN ISO 13501-1:2007-Dfl-S1
Slip Resistance	DIN 51130: R9, V10, ASTM 1677: 1.1/0.9
Wind Resistance	When loose laid, TPO Roof Grip can withstand winds up to 55mph (89 km/h)
Environment	100% recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Matting Colour Options

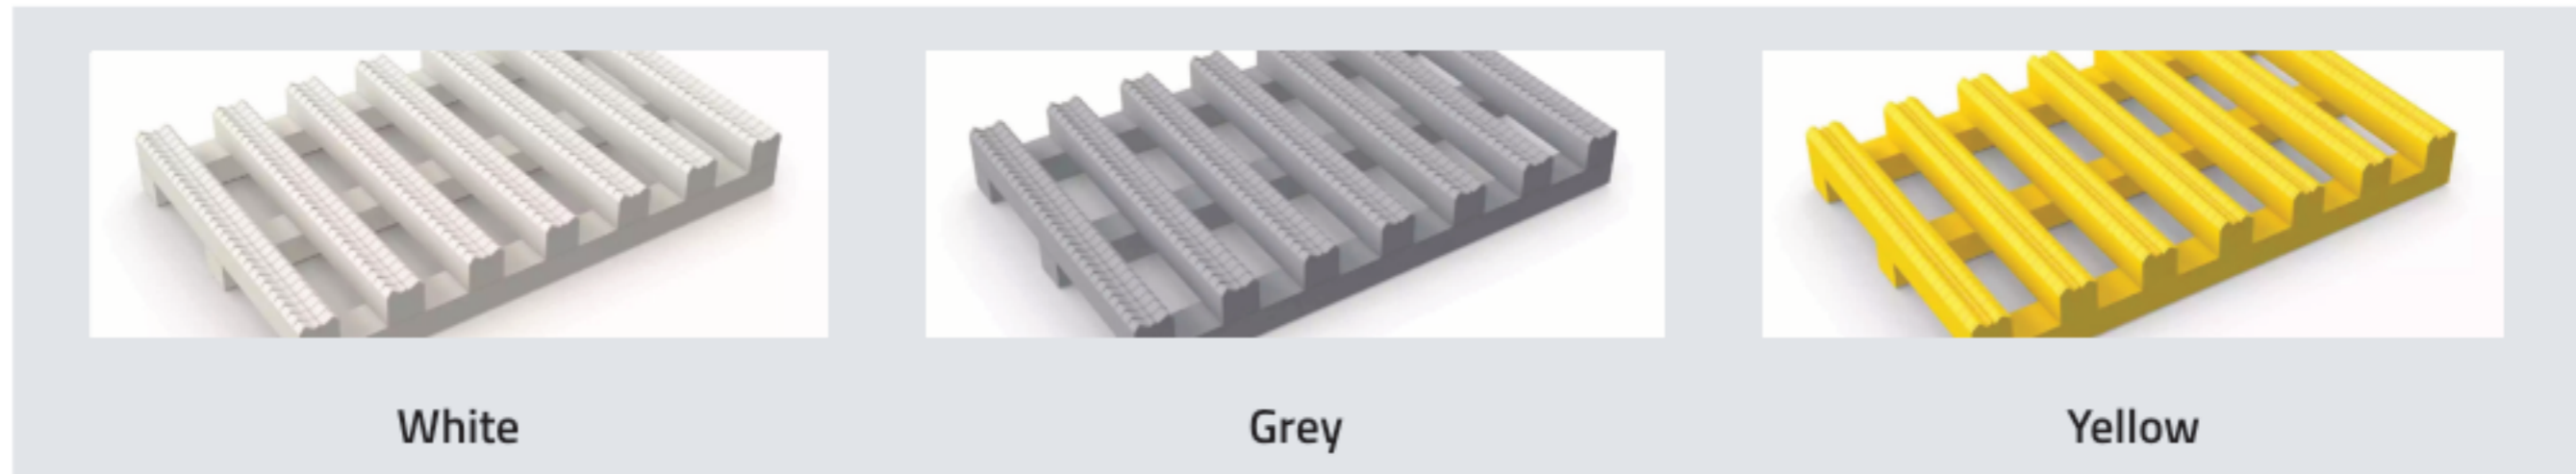

White

Grey

Yellow

Other colours available as a special order, subject to minimum order quantities

### Matting Installation

As we supply our TPO Roof Grip matting in a single roll, installation is quick and simple.

- Loose lay, no permanent fixtures required
- Supplied in 10m rolls, simply cut to size
- Holes can be cut to accommodate pipes
- Contours to the roof & floor surface

### Cleaning & Maintenance

Keeping TPO Roof Grip matting clean is a quick and easy job.

- Dirt & debris will naturally fall away from surface of the matting
- Simply lift or roll matting to clean
- Clean area beneath the matting with a brush or a high pressure hose

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.