

FlexiLine Fine Ribbed Matting Datasheet


Product Code: RC04164

Product Description

Our FlexiLine fine ribbed matting provides a practical and cost efficient alternative to standard rubber work mats. As the name suggests, this matting solution features a fine ribbed design that enables it to provide excellent anti-slip properties in a variety of applications. This product has a thickness of 2mm and is available in 1m x 25m rolls.

Size Specifications

Stock Sizes	Thickness	Weight (Kg/m ²)
25m x 1m	2mm	2.2

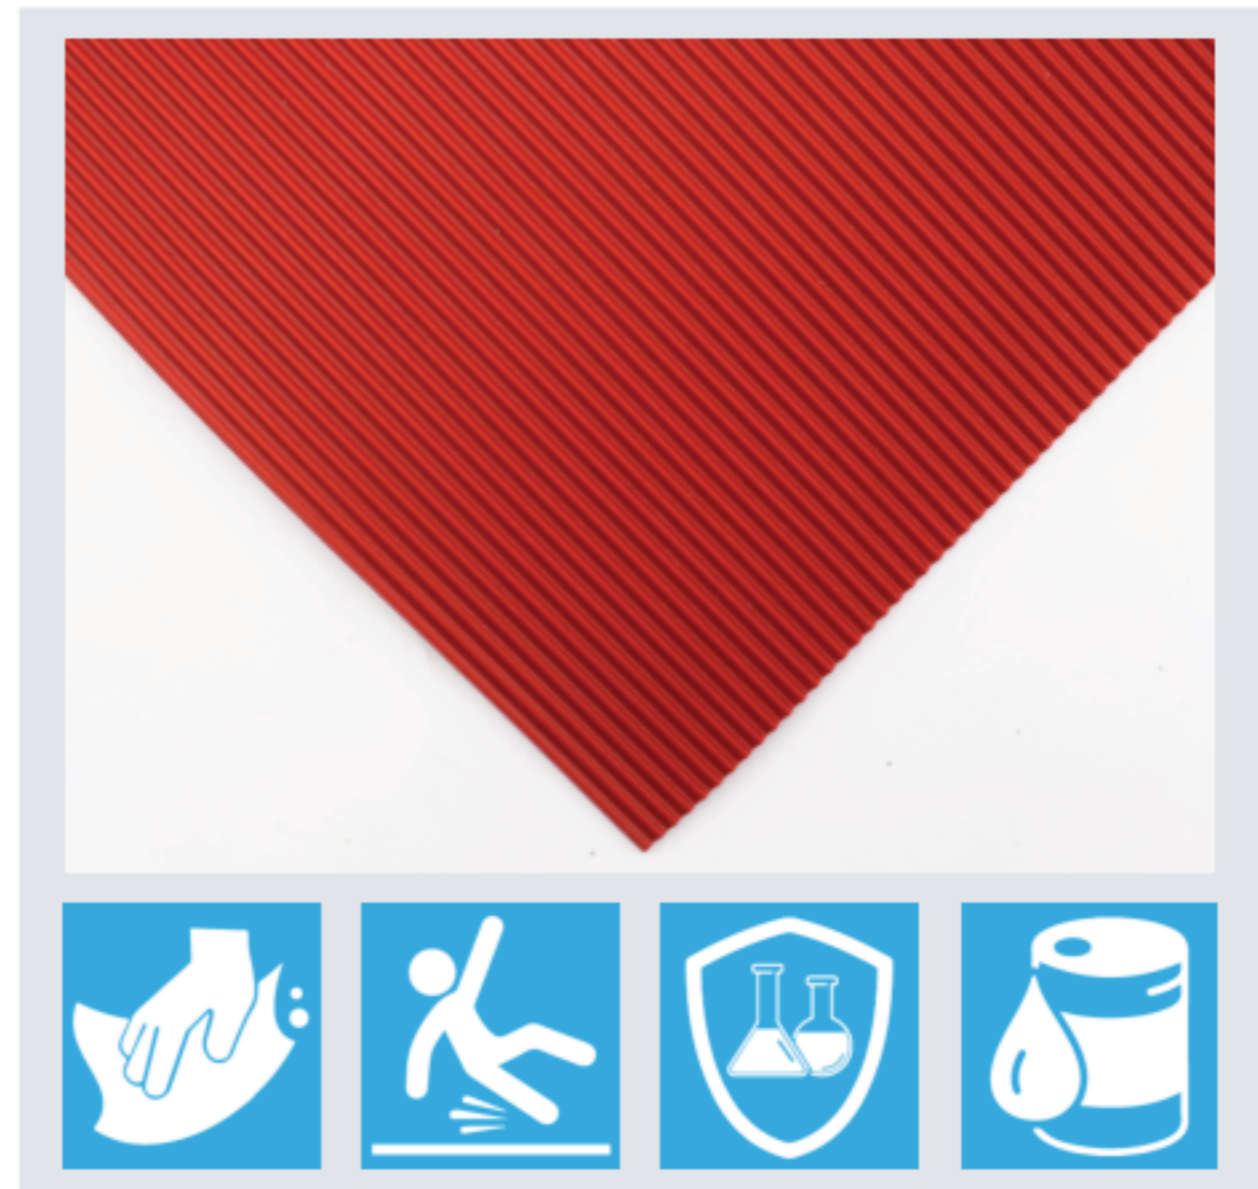


**ISO
9001 : 2015
REGISTERED**

Technical Specification

Properties	Data
Product	Fine Ribbed Matting
Composition	Flexible Polyvinyl Chloride (PVC)
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	EN 13501-1: 2007-Bfl-S1
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%
Environment	100% recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Matting Colour Options

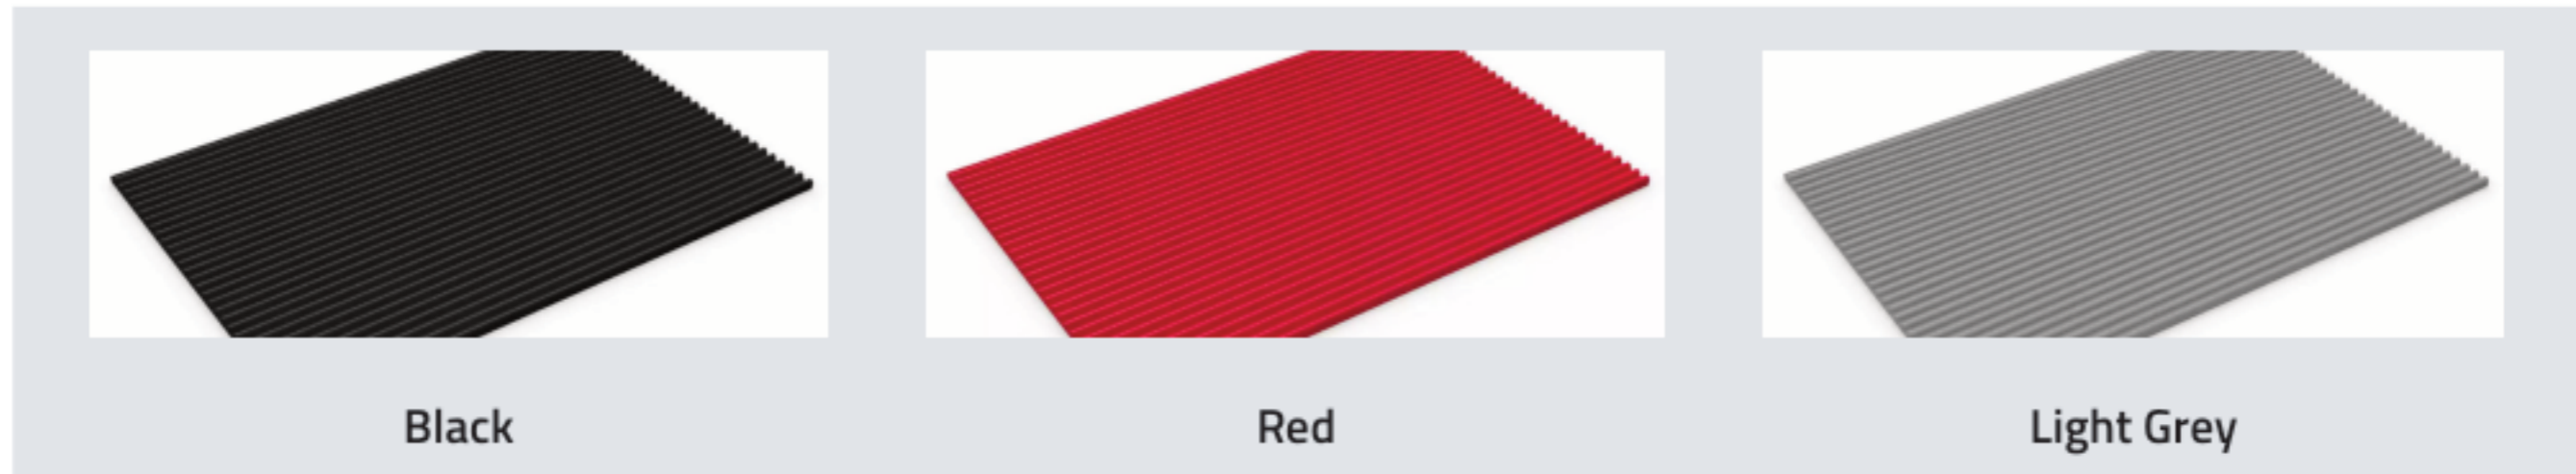

Other colours available as a special order, subject to minimum order quantities

Matting Installation

As we supply our Fine Ribbed PVC matting in a single roll, installation is quick and simple.

- Loose lay, no permanent fixtures required
- Supplied in 25m rolls, simply cut to size
- Holes can be cut to accommodate pipes
- Contours to the floor surface

Cleaning & Maintenance

Keeping our Fine Ribbed PVC matting clean is a quick and easy job.

- The matting is light & easy to handle
- Simply lift or roll matting to clean
- Easy to clean with a vacuum or mop

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.