

## Anti Slip PVC Matting | PVCLINE Datasheet

Product Code: RC04169

### Product Description

Our anti slip PVC matting is a high quality, safe flooring solution which is ideal for use in environments which come into contact with water. The unique design on the surface of the mats prevent water from building up on the walking surface. Small channels run down the length of the matting which collects any loose water and directs it away from the mat.



### Size Specifications

Stock Sizes	Thickness	Weight (Kg/m <sup>2</sup> )
10m x 0.6m	6mm	3.70
10m x 0.91m	6mm	3.70




### Technical Specification

Properties	Data
Product	Anti-Slip PVC Matting
Composition	Flexible Polyvinyl Chloride (PVC)
Acoustic Insulation	Excellent sound absorption properties
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	DIN 4102 Part 1- Classification B2. BS 2782 Part 1, method 140A: 1992 (ISO 1210:1992)
Slip Resistance	ASTM F 1677 - Dry/Wet: 1.0/0.8, DIN51130: R11, V10, DIN51097: Classification C
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%
Hygiene	Naturally resistant to bacteria growth
Environment	100% recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Matting Colour Options

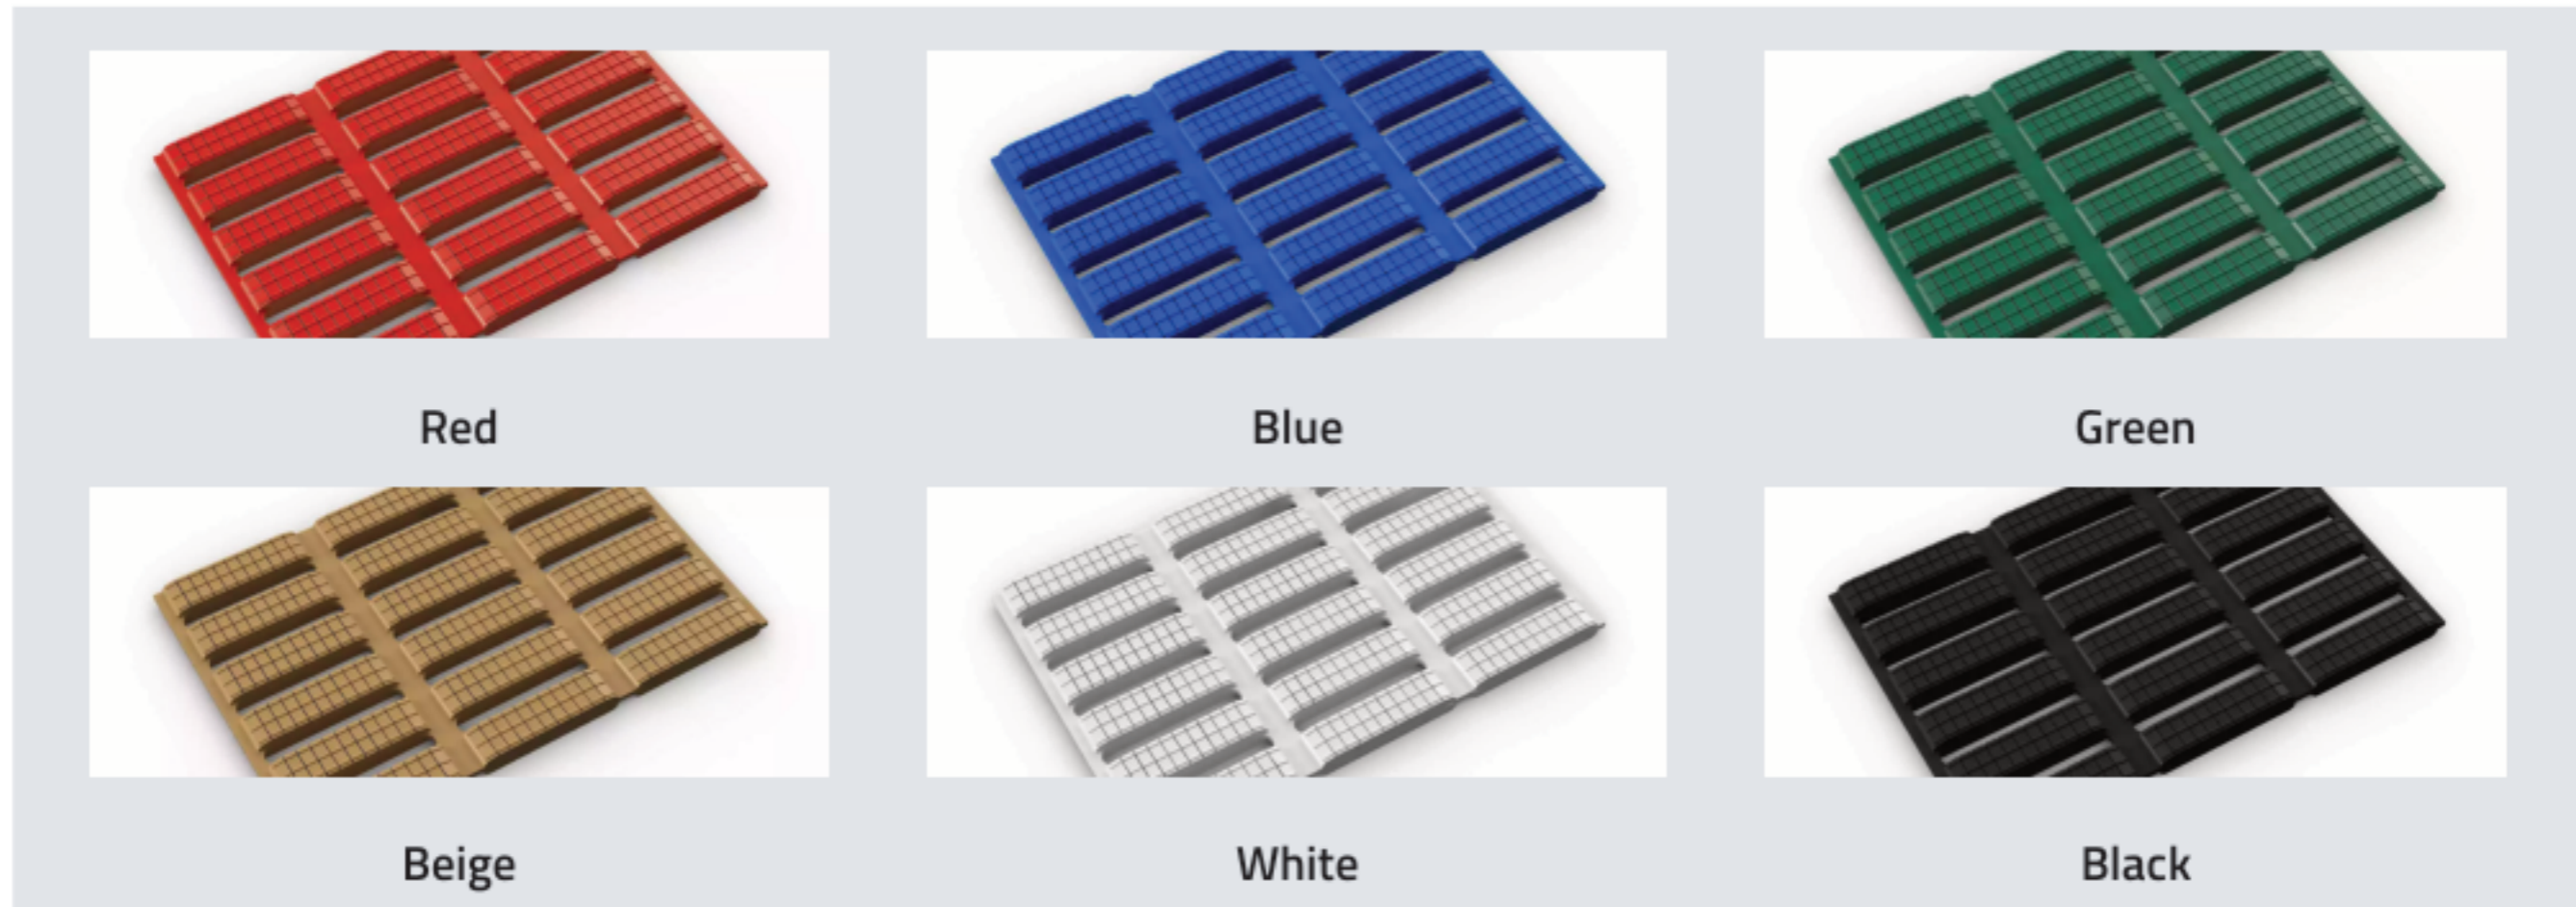

Other colours available as a special order, subject to minimum order quantities

### Cleaning & Maintenance

A regular cleaning schedule can help to maintain both the effectiveness and the life span of our PVCLine Anti Slip Matting.

While this product does contain anti-bacterial and anti-fungal additives in order to protect against fungal and bacterial contamination. We do recommend regular cleaning to remove light grease and oils, food fat, wax and acrylic polishes.

#### Preparation

Check the matting is free from any loose items like rubbish and clothing fibres.

#### Hand Cleaning

Hand cleaning should be done as required, using an alkaline cleaning fluid as per the manufacturer's instructions. The matting can be cleaned in place, simply apply the solution with a spray bottle or mop and allow it to penetrate any grease or dirt. If required, you can use a stiff brush to work the cleaning solution into the dirt. Allow to soak before rinsing with water.

#### Machine Cleaning

The frequency of which you machine clean the matting will depend entirely on the amount of foot traffic the area gets.

First you must spray the surface with an alkaline solution, and then using a cylindrical brush machine, clean the top surface of the matting in the direction of the top ribs. If there's an etched pattern on the top ribs where dirt can easily collect, make additional cross passes to ensure a thorough clean.

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.