


Diamond Interlocking Rubber Mats

Product Code: RC04178

Product Description

Our diamond interlocking rubber mats have been specifically designed to provide an easy to install on-site solution. These heavy duty rubber mats feature good physical properties with moulded air pockets on the underside. This creates a matting that is not only very tough and durable but also very comfortable to stand on for long periods of time.

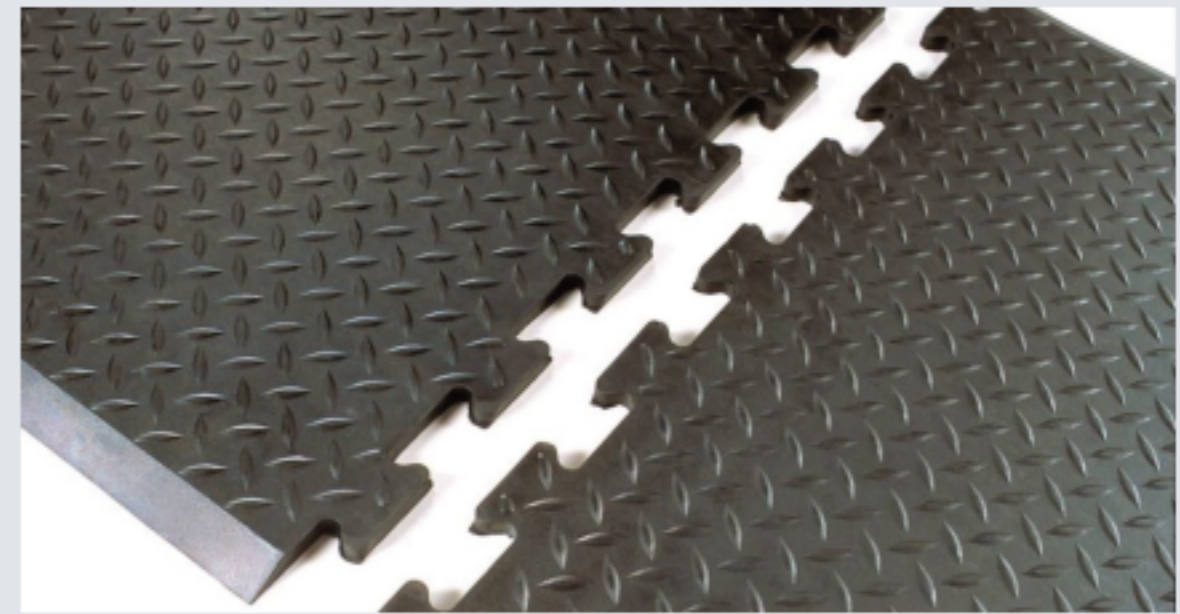

Mat Size	Thickness
71cm X 79cm	12.7mm

Technical Specification

Specifications	Values
Wear Resistance	Wear resistant surface to level 2
Anti-Fatigue	Anti-fatigue protection to level 2
Slip Resistance	Slip resistance level 2
Impact Resistance	Impact resistant
Connectable	Mats are connectable and can join together
Wheeled Area	Suitable for use by wheeled trolleys
Dry Area	Suitable for use in dry areas

Product Testing	Test Specification
Compression Deflection	25% ASTM D575 17.5 lb/in ² 50% ASTM D575 56.1 lb/in ²
Foam Battery	ASTM D3574 40 lb/in ²
Abrasion Resistance	ASTM D3884-01 1000 Cycles 1.45 g 5000 Cycles
Static Coefficient of Friction	ASTM C1028-96 0.88
Elongation at Break	ASTM D412
Breaking Load	ASTM D412
Graves Tear Strength	ASTM D 1004
Hardness	ASTM D2240-02
Anti-Slip	DIN 51130 & BG-RULE BGR181

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.