


## TICO S/PA® Anti-Vibration Material Datasheet

Product Code: RC1105-SPA

### Product Description

TICO S/PA® anti-vibration material combines excellent noise and vibration absorption in a highly durable and resistant format. This high-performance material is ideal for applications that require an easy-to-cut and simple-to-install solution.

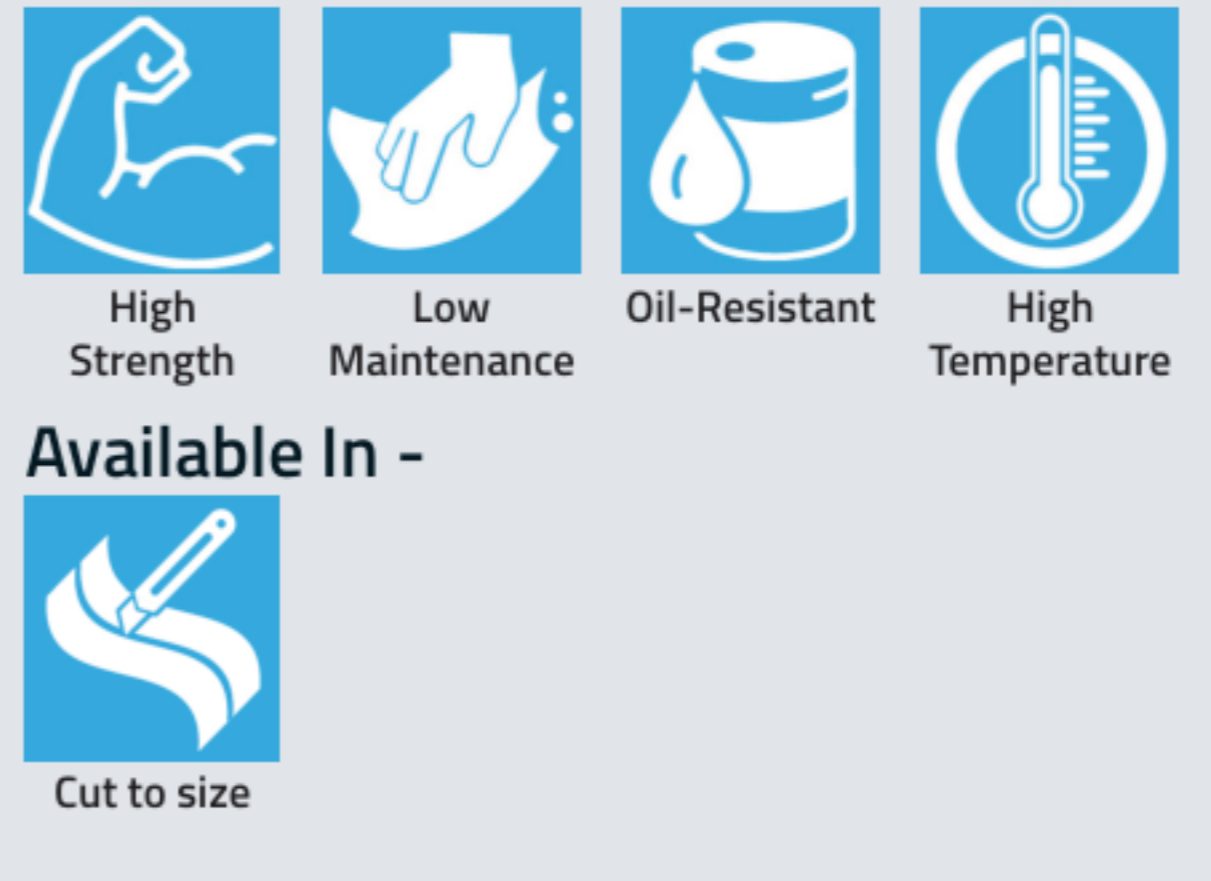

### Material Properties

Properties	Value
Material:	Cork particles and Polychloroprene/Acrylonite elastomers
Hardness (Shore A):	69 ± 5 °
Colour:	Reddish-Brown
Maximum Load Bearing Capacity:	0.5 MN/m <sup>2</sup>
Tensile Strength:	2.1 MN/m <sup>2</sup>
Elongation at Break:	50 to 80%
Thermal Conductivity:	0.101 W/m °C
Coefficient of Friction:	0.65 (to concrete), 0.5 (to bright mild steel)
Operating Temperature Range:	-40°C to +100°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Standard Dimensions

Properties	Value
Thicknesses:	6.0mm, 9.5mm, 12.5mm, 19.0mm, 25.0mm
Widths:	50mm, 75mm, 100mm, 125mm, 150mm, 300mm, 600m, 1200mm
Lengths:	1200mm



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.