


RUBBAHATCH® 30MM X 20MM COMPOSITE DOOR & HATCH PACKING

Product Code: RUBBAHATCH-30-20

ISO
 9001 : 2015
 REGISTERED

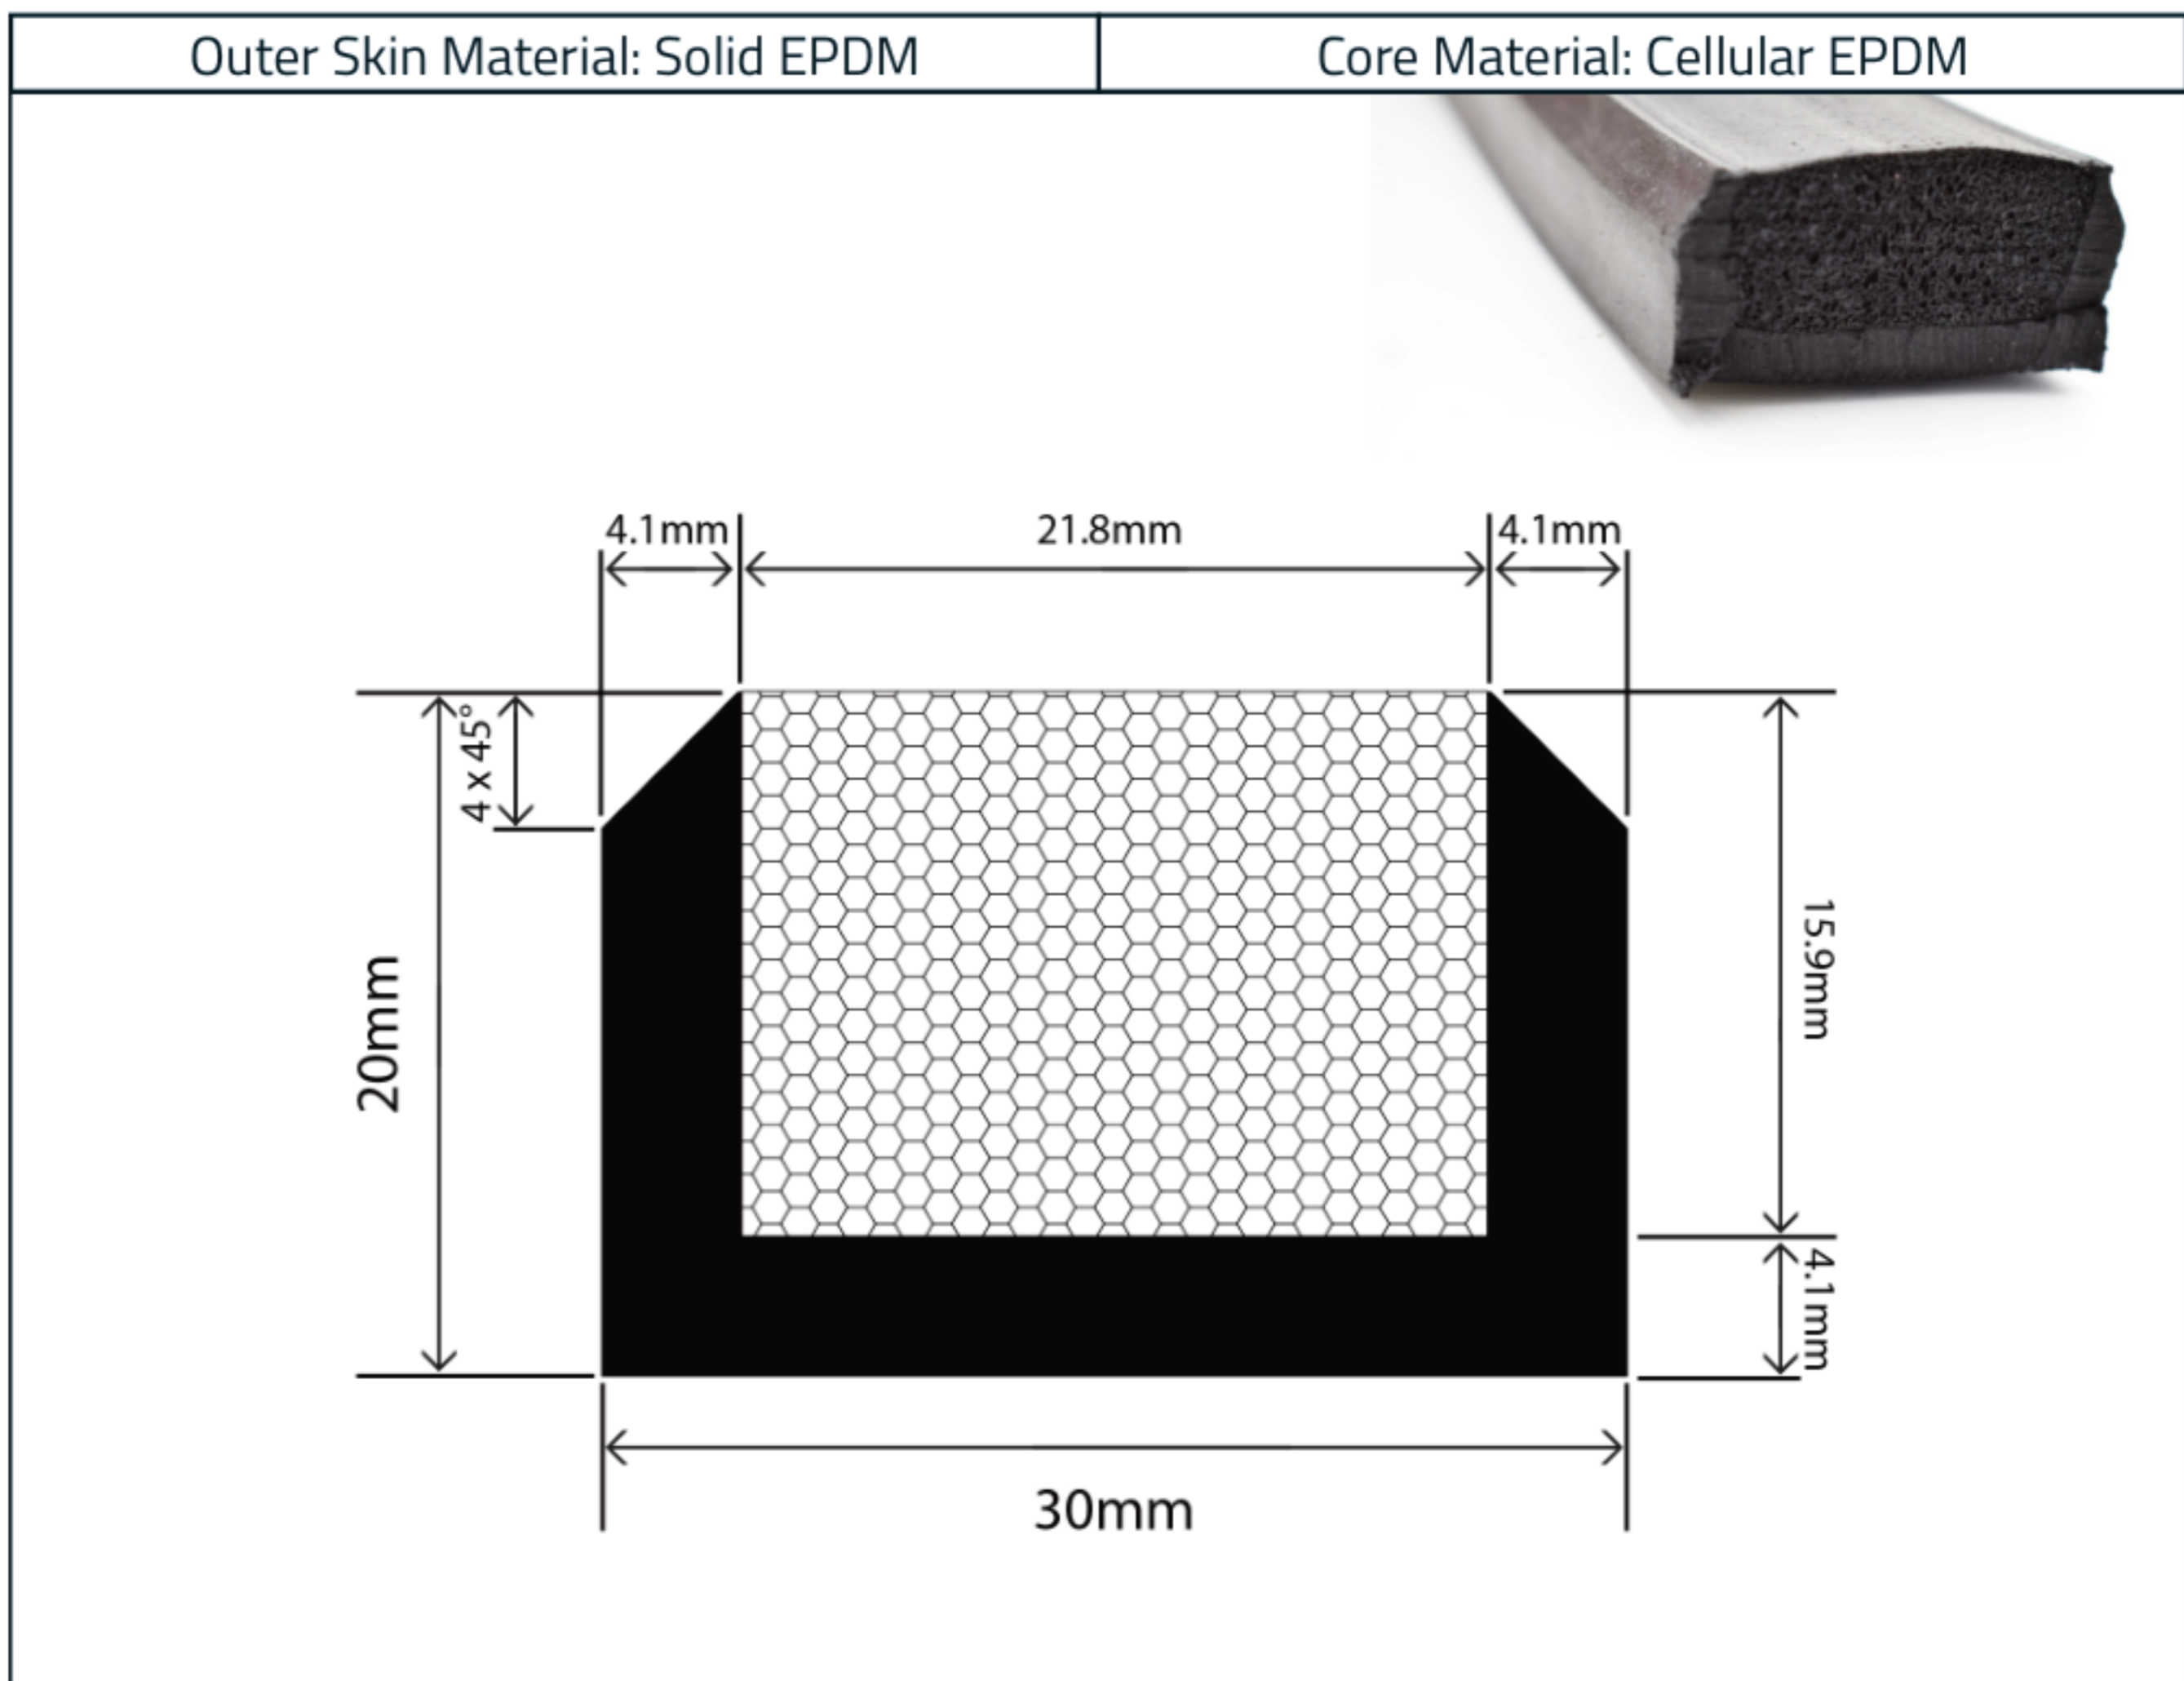

Measurements:

Height	Width	Standard Coil Length
20mm	30mm	25m

EPDM - Outer Rubber Skin Material Specification

Property	Test Method	Value
Polymer	-	EPDM (Ethylene Propylene Diene Momomer)
Shore Hardness (Shore A)	ISO 7619-1	67°
Tensile Strength	ISO 37	7.72 Mpa
Elongation at Break	ISO 37	360%
Tear Resistance	ISO 34-1	20.18 N/mm
Compression Set (22hrs @ 70°C)	ISO 815	25.1%
After Low-Temperature Ageing Hardness	DIN 53505	+4°
Ozone Resistance (72h @ 40°C-50pphm)	ISO 1431-1 A	No Crack
UV Resistance	ASTM D 1148	No Migration
Brittle Point Test	ISO 812	No Crack
Operating Temperature Range	-	-40°C to + 120°C

Closed Cell EPDM Sponge - Core Material Specification

Property	Test Method	Value
Polymer	-	EPDM (Ethylene Propylene Diene Momomer)
Density	ISO 2781	0.6g/cm ³
Tensile Strength	ISO 37	2.8 Mpa
Elongation at Break	ISO 37	140%
Compression Deflection	ASTM D 1056	12.1 Kpa
Water Absorption	ASTM D 1056	0.98%
Ozone Resistance (72h @ 40°C-50pphm)	ISO 1431-1 A	No Crack
Heat Transfer Coefficient	TS EN 12667	0.15 W/m.K
Operating Temperature Range	-	-40°C to + 120°C

Material Benefits

- Excellent weather and ozone resistance
- Good UV stability
- High elasticity and low permanent deformation
- Resistance to ordinary diluted acids and alkalines
- Resistance to polar substances, water, steam, ketones
- High electrical insulating properties

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.