


RubbaClean-R Entrance Matting System Datasheet

Product Code: R-CLEAN-CS-R

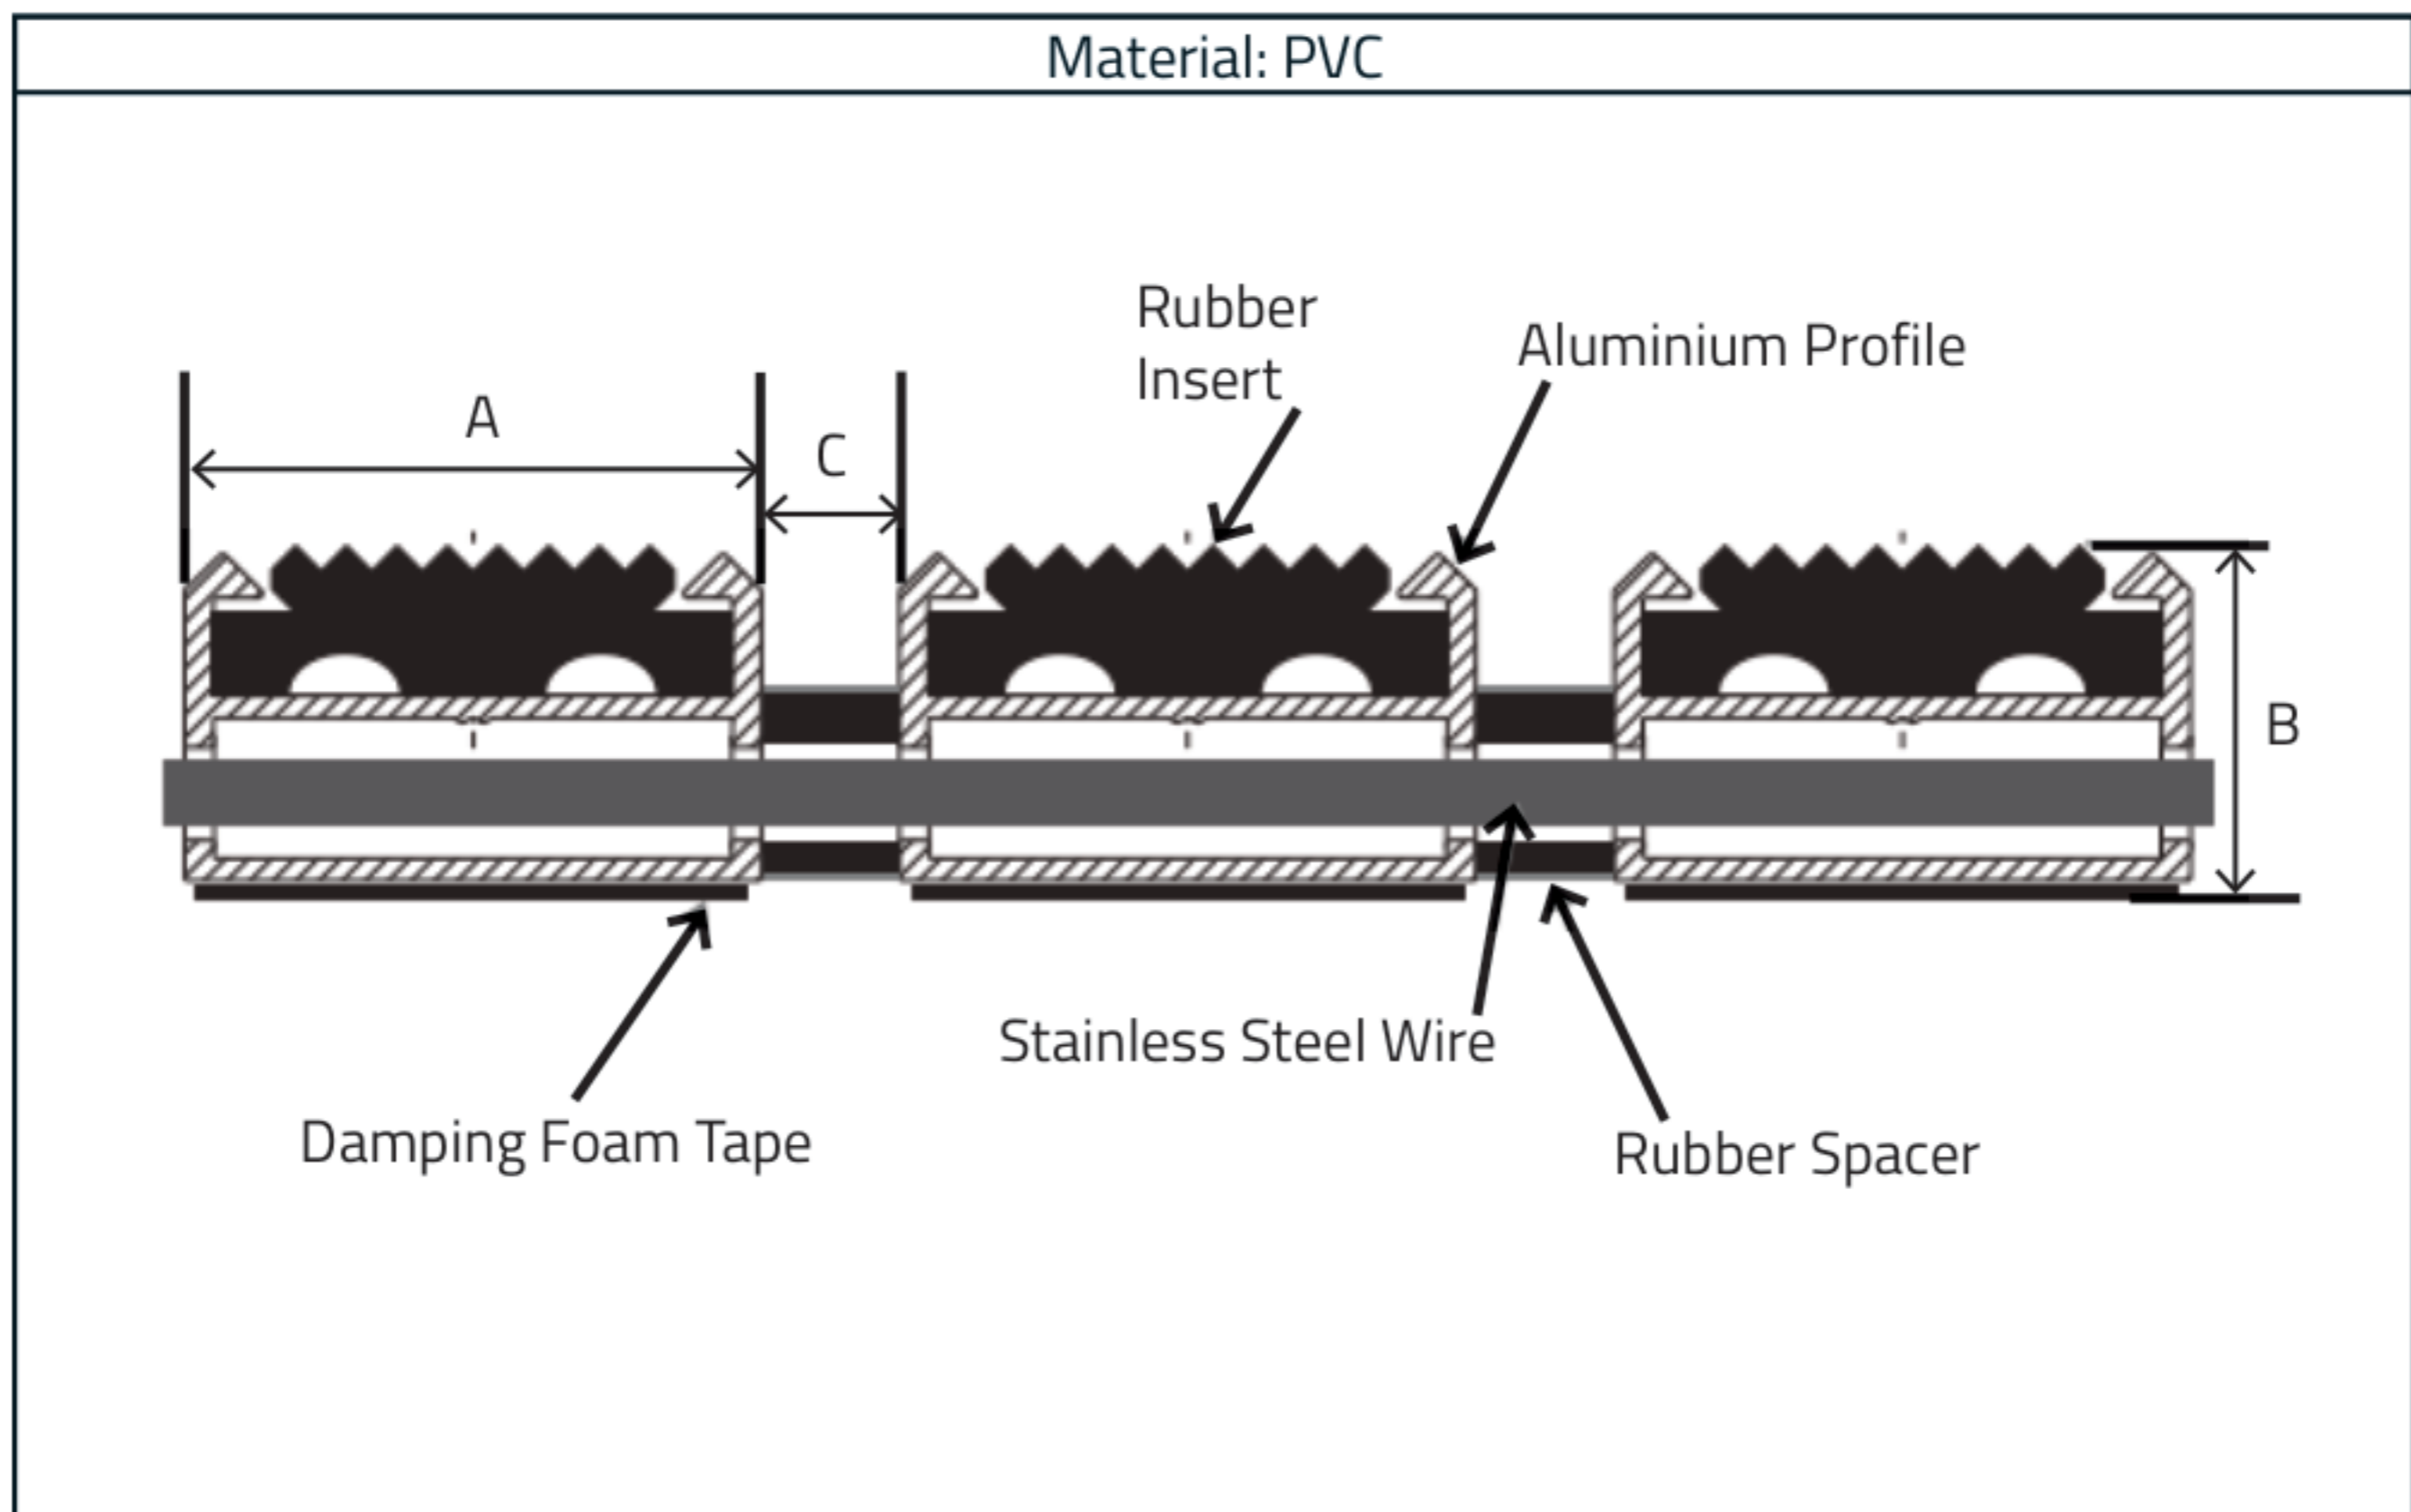

Measurements:

	A (mm)	B (mm)	C (mm)
RubbaClean-R 12	30	14	3 - 4.5
RubbaClean-R 17	30	18	3 - 4.5
RubbaClean-R 22	30	22	3 - 4.5
RubbaClean-R 27	31	27	3 - 4.5
RubbaClean-R 22 Strong	32	22	3 - 4.5

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data (Rubber Insert)

Property	Value
Material	Insert is made of PVC with pigments
Density	1.37 g/cm ³
Hardness (Shore A)	85±3
Tensile Strength	>23 MPa

Certificates & Approvals

Property	Certificate
Hygienic Certificate	B-BK-60211-0449/19
Anti-Slip Norm According to DIN 51130:2014	R12
Fire Classification According to PN-EN-13501-1+A1:2010	CFL-S1
Declaration of Performance	CE
Material of Aluminium Profile	EN AW 6063 T6
Stationary Load	2500kg/100cm ² - standard version 3400kg/100cm ² - strong version



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.