


## RubbaClean-RS Entrance Matting System Datasheet

Product Code: R-CLEAN-CRS-RS

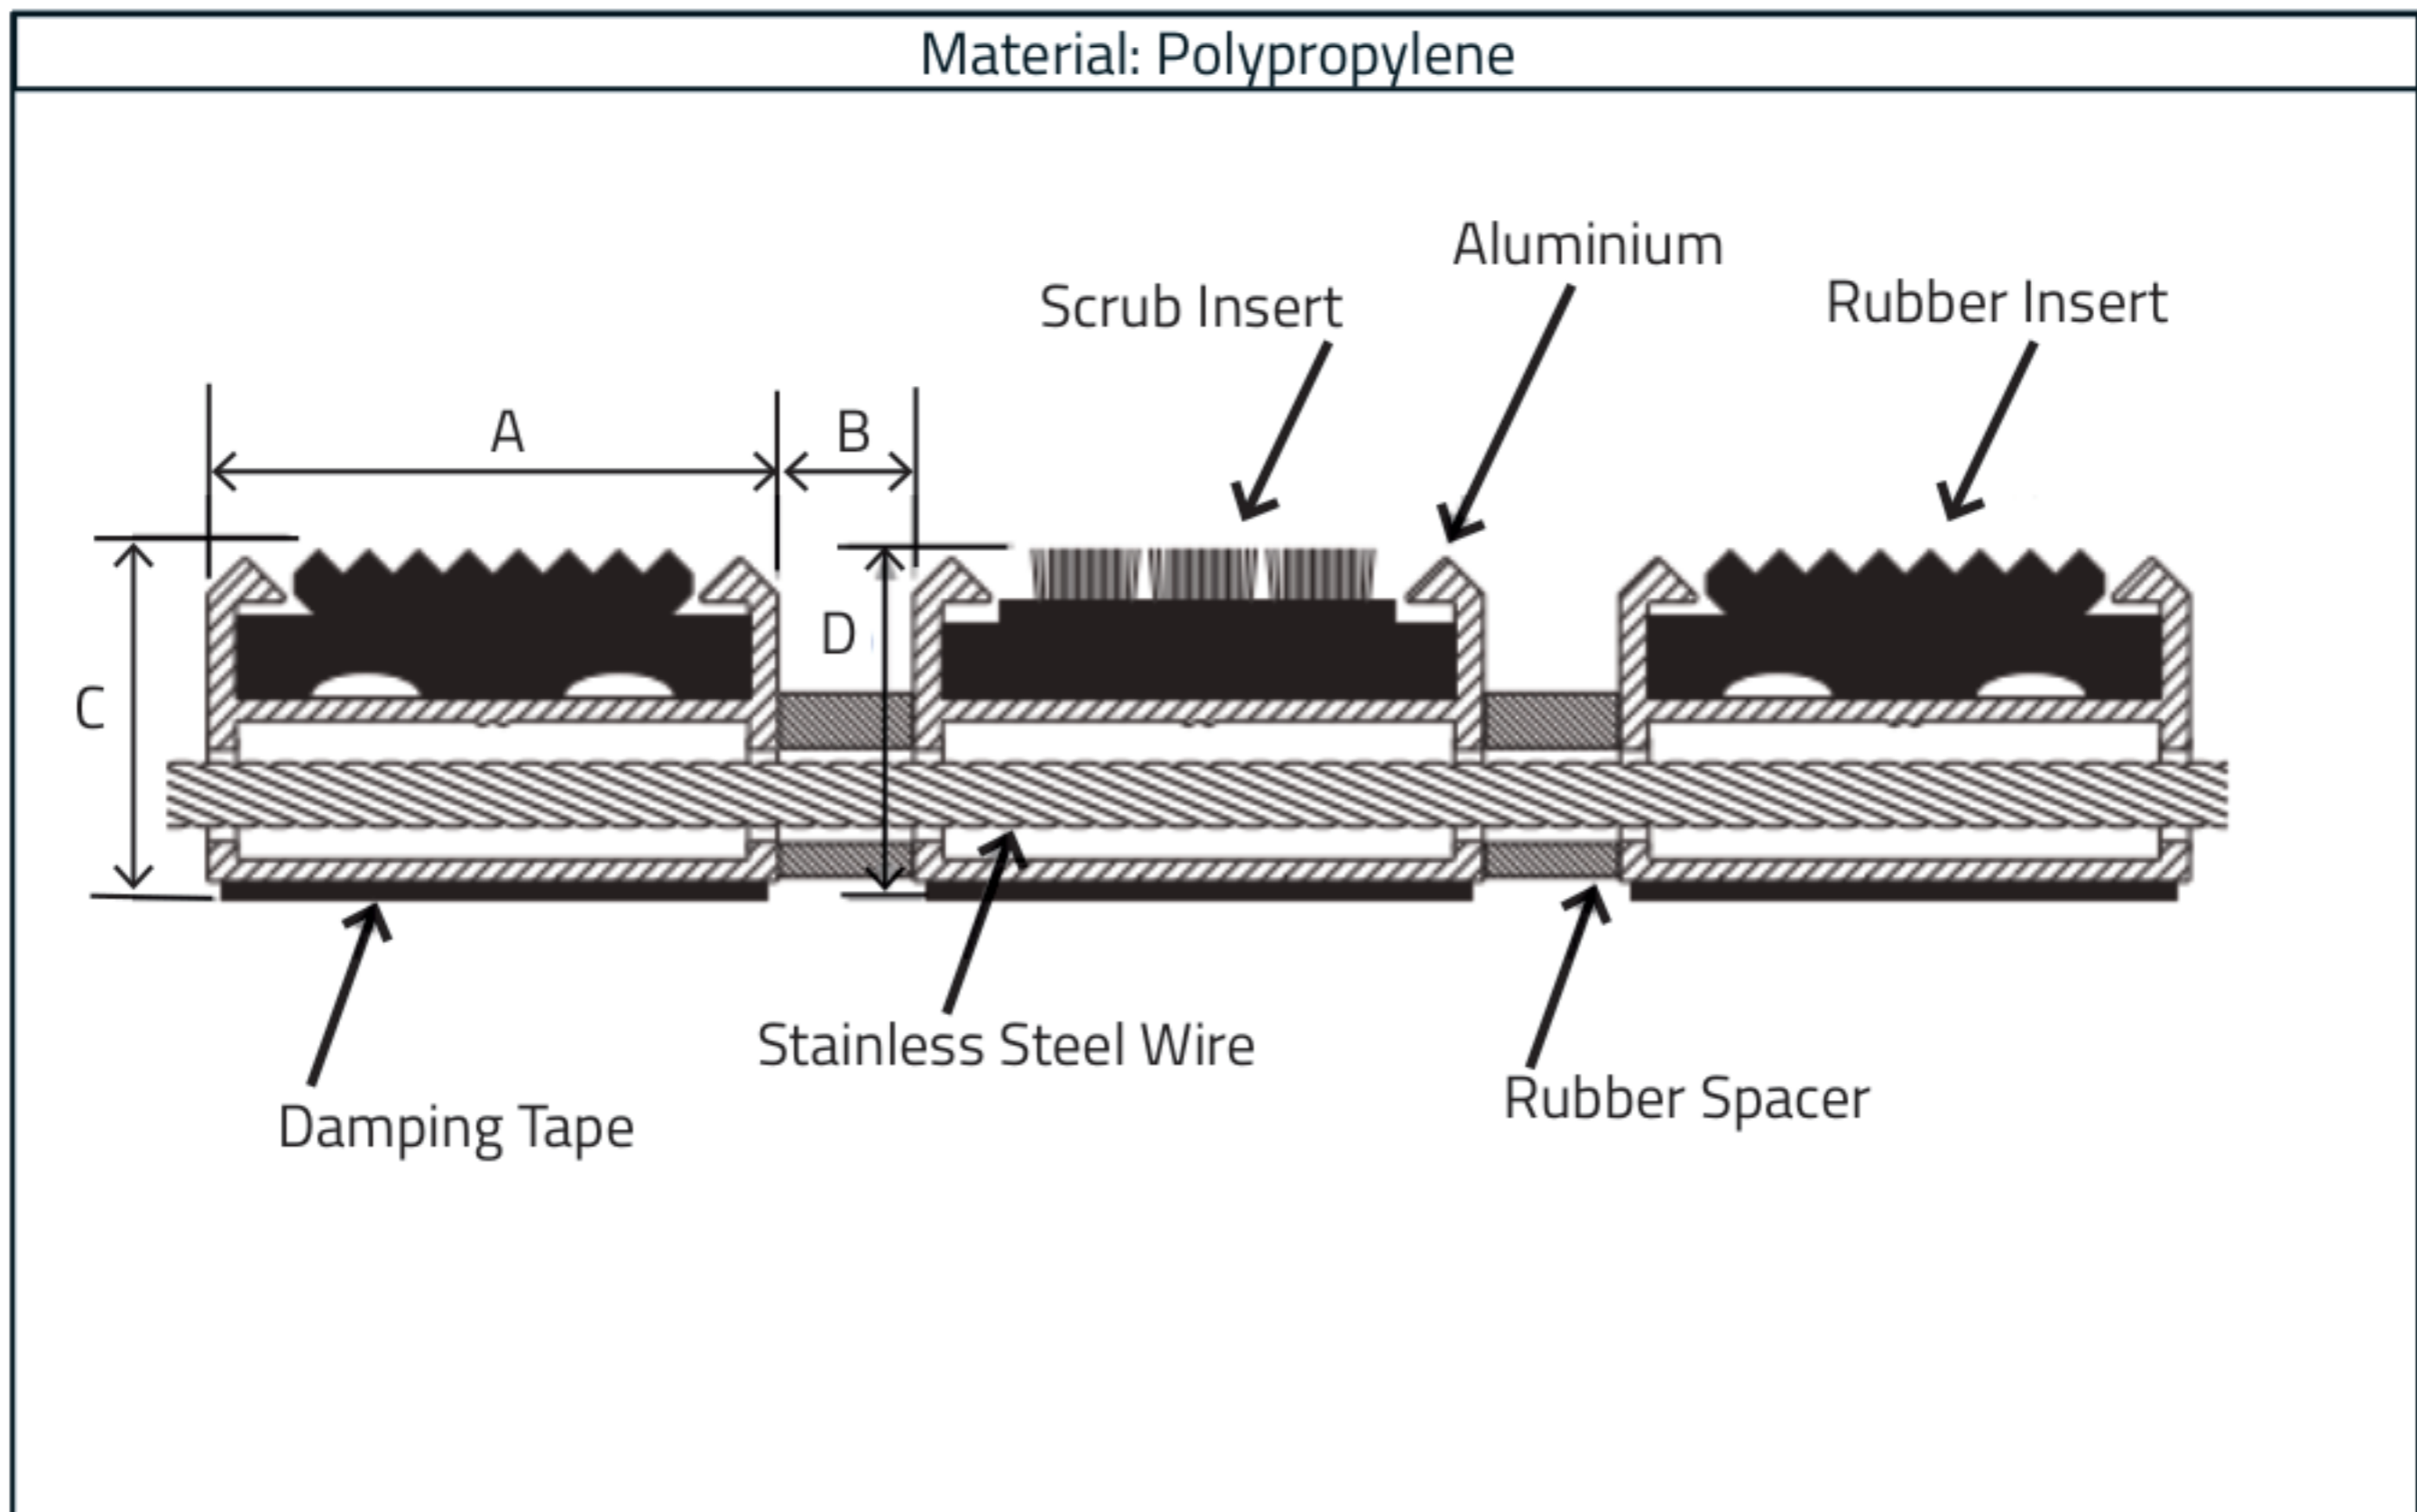

### Measurements:

	A (mm)	B (mm)	Scrub C (mm)	Textile D (mm)
RubbaClean-RS 12	30	3 - 6.5	14	16
RubbaClean-RS 17	30	3 - 6.5	18	20
RubbaClean-RS 22	30	3 - 6.5	22	24
RubbaClean-RS 27	31	3 - 6.5	27	29
RubbaClean-RS 22 Strong	30	3 - 6.5	22	24

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Technical Data (Rubber Insert)

Property	Value
Insert Material	Insert is made of elastomers with pigments
Density	1.37 g/cm <sup>3</sup>
Hardness (Shore A)	85±3
Tensile Strength	>23 MPa

### Technical Data (Scrub Insert)

Property	Value
PA6.6 fibre with the thickness of	0.4mm
Base profile material	Polypropylene
Stainless steel wire thickness	0.7mm
According to the manufacturer declaration, the scrub insert meets the requirements of the EU directive 2002/95/EC, which entered into force on 1 July 2006, and is manufactured in accordance with the ROHS 2002/95/EC directive.	

### Certificates & Approvals

Property	Certificate
Hygienic Certificate	HK/B/0628/01/2014
Anti-Slip Norm According to DIN 51130:2014	R11/13
Fire Classification According to PN-EN-13501-1+A1:2010	CFL-S1
Profile Material	EN AW 6063 T6
Static Load	6,500,000 N/m <sup>2</sup>



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.