宇航橡胶 YuHang Rubber RUBBER

南京宇航橡胶有限公司
NANJING YUHANG RUBBER CO.LTD

Manufacturers · Designers · Distributors

Neoprene T Section - 11.60mm x 28.00mm

Product Code: RC0200-I0942

Material: Neoprene

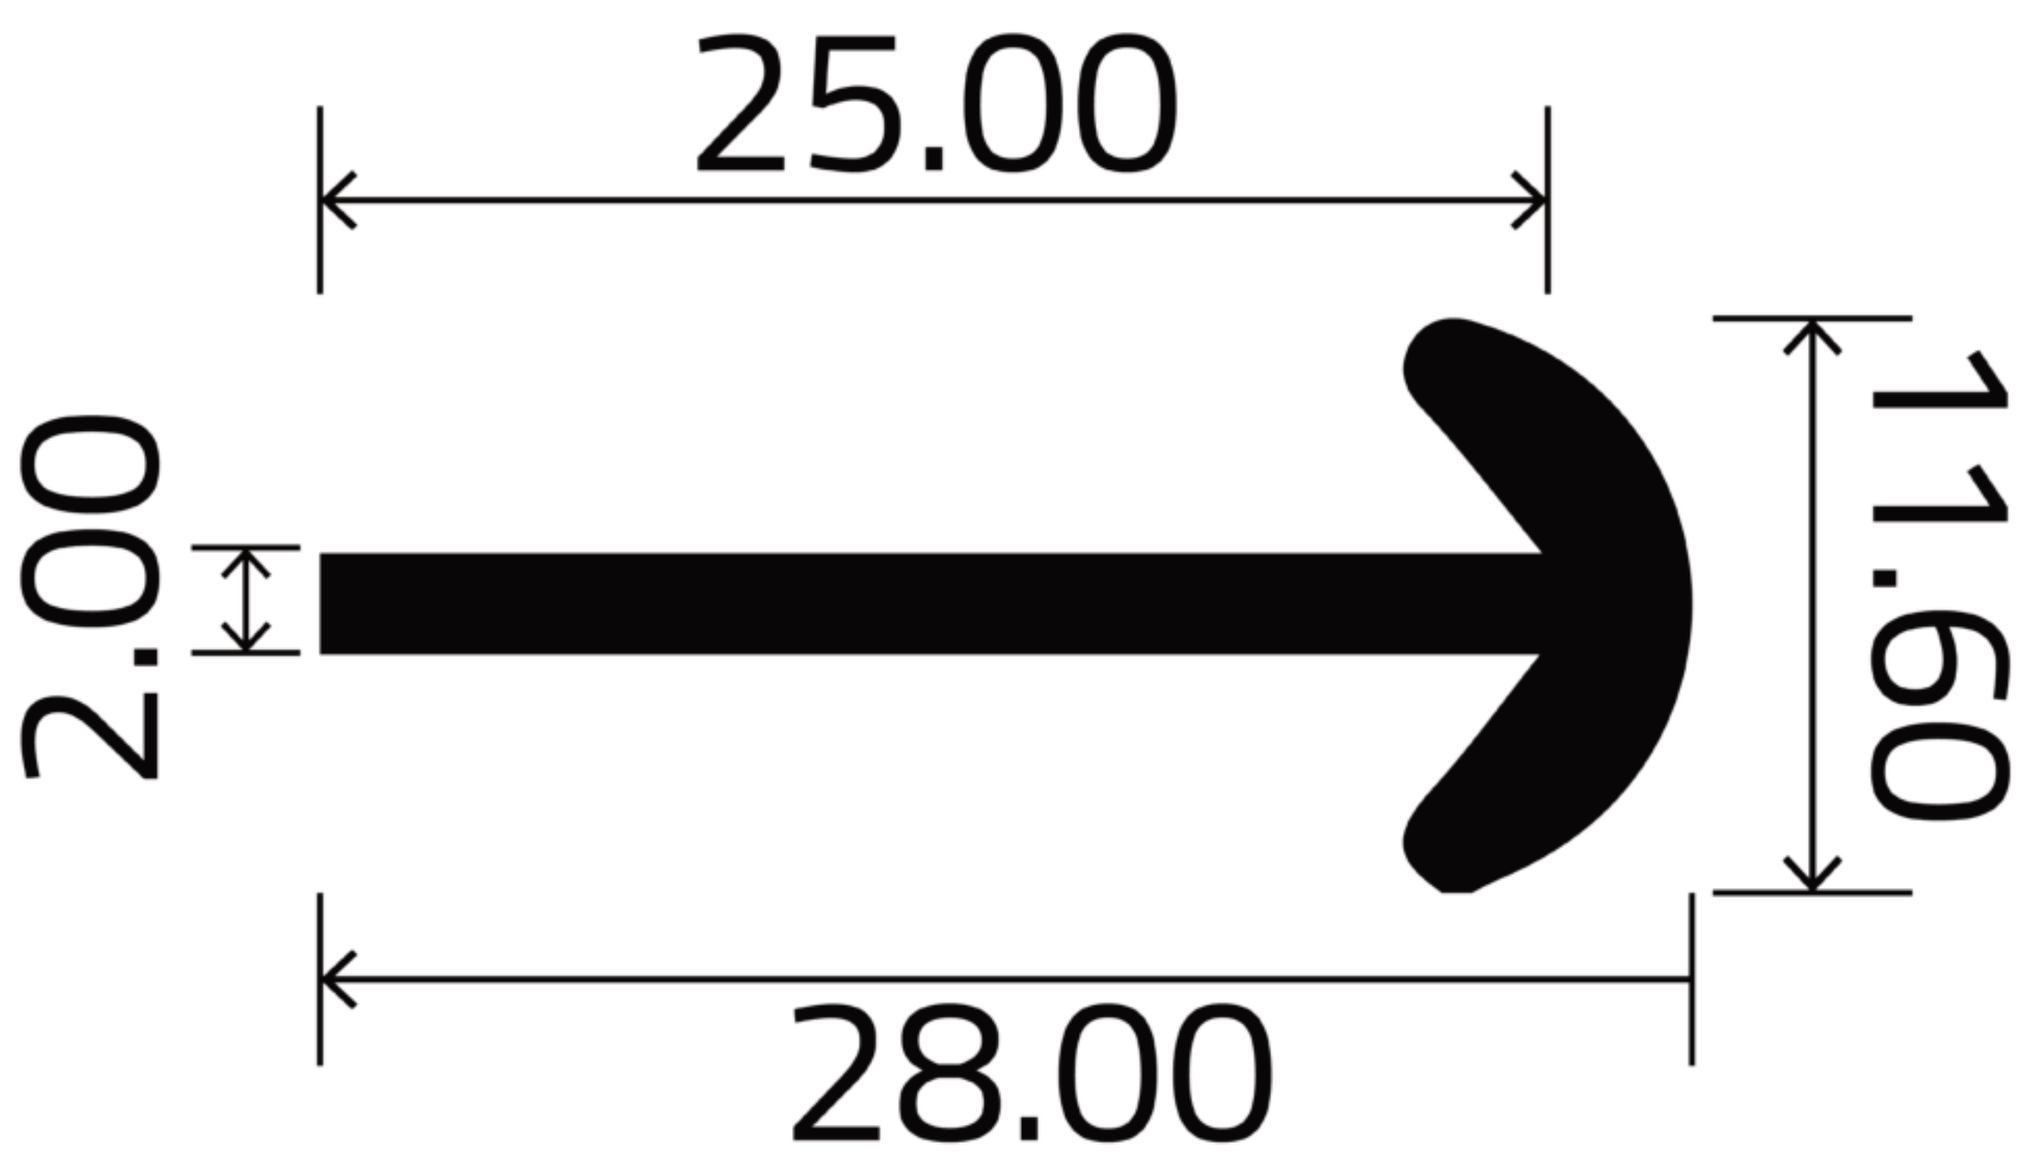

Measurements:

Height	Width
11.60mm	28.00mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E-mail: sales@rubbermanufact.com Http://www.rubbermanufact.com TeL:+86 18005162255

Nanjing YuHangrubber company limited in China Jiangshu

Technical Data

Property	Specification	Value
Hardness	70±5	73
Tensile Strength	10 Mpa min	13 Mpa
Elongation at Break	250% min	300%
A14 - Heat Ageing (70hrs @ 100°C)		
Change in Hardness	+15 max	= 10
Change in Tensile	-15% max	-6%
Change in Elongation	-40% max	-23%
B14 - Compression Set (22hrs @ 100°C)	35% max	33%
E014 - Fluid resistance oil No. 1 (70hrs @ 100°C)		
Change in Hardness	**± 10% max**	**= 8**
Change in Tensile	-30% max	-15%
Change in Elongation	-30% max	-20%
Change in Volume	-10 to +15%	+3%
E034 - Fluid Resistance Oil No.3 (70hrs @ 100°C)		
Change in Tensile	-60% max	-45%
Change in Elongation	-50%	-47%
Change in Volume	+100%	+85%
F17 - low temp brittleness (non-brittle @ 3 min @ 55°C)	Pass	Pass
Colour	Black	
Weight	0.13kg	
Max Continuous Length	30 metres	

T-shaped Neoprene rubber strip in black, measuring approximately 22mm in length and 13mm in width, with a tail thickness of about 2mm.

Applied for sealing purposes in doors, windows, and various other sealing applications within classic cars, buses, caravans, aircraft, trains, marine vessels, and across different industries.

REACH COMPLIANT · COMPLIANT · COMPLIANT

QMS ISO 9001 : 2015 REGISTERED

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E-mail: sales@rubbermanufact.com Http://www.rubbermanufact.com TeL:+86 18005162255
Nanjing YuHangrubber company limited in China Jiangshu