


## Neoprene Door Seal Profile - 8mm x 16mm

Product Code: RCK-0011

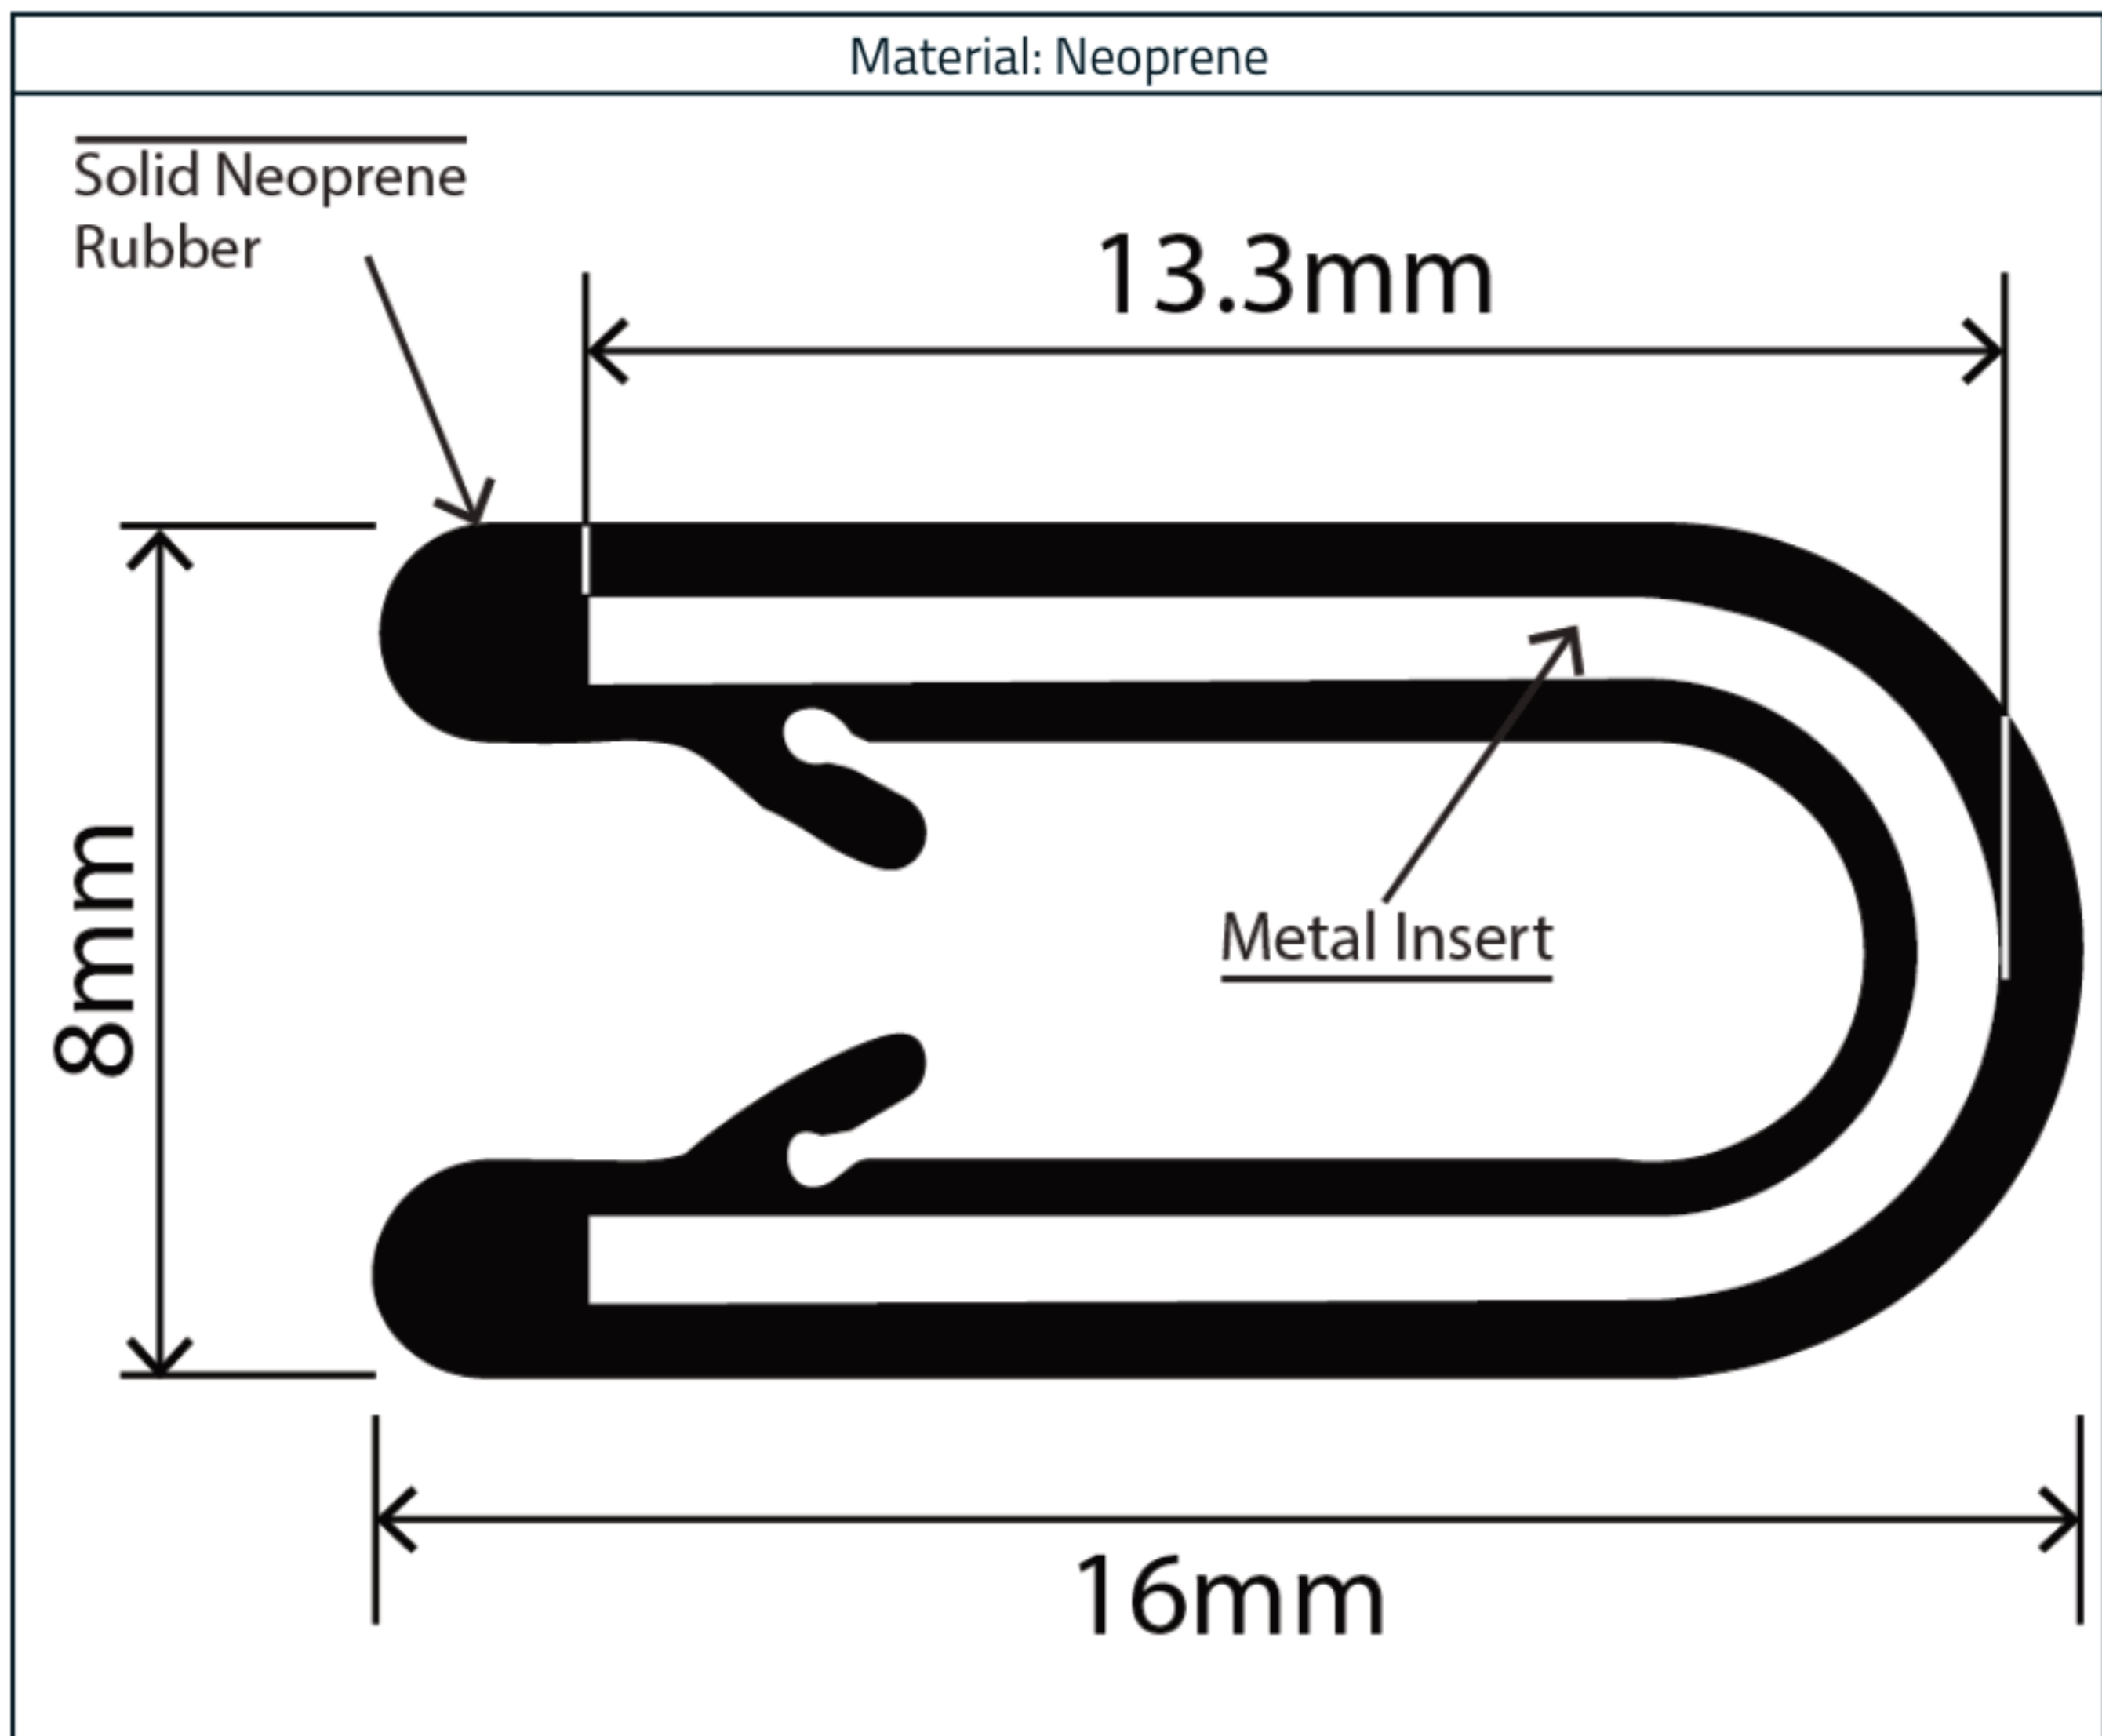

### Measurements:

Height	Width
8mm	16mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

### Technical Data - Neoprene

Property	Test Method	Value	
Compound	-	Neoprene (CR)	
Colour	-	Black	
Hardness (Shore A)	ISO 7619-1	73-74°	
Tensile Strength	ISO 37	9.51 MPa	
Elongation at Break	ISO 37	235%	
Tear Resistance	ISO 34-1	18.7 N/mm	
Density	ISO 2781	1.4 g/cm <sup>3</sup>	
Ozone Resistance (72hrs @ 40°C -50pphm)	ISO 1431-1 A	NO CRACK	
UV Resistance	ASTM D 1148	NO MIGRATION	
Brittleness Point (24hrs @ -40°C)	ISO 812	NO CRACK	
Rheometer Test (3 min @ 185°C)	ISO 3417	MH	4.62 Dn.m
		ML	1.26 Dn.m
Thermal Ageing	ISO 188		
Shore Hardness Change	ISO 7619-1	+5°	
Tensile Strength Change	ISO 37	-2.5%	
Elongation at Break Change	ISO 37	-20.57	

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.